

CODICE

BN26WC0212104LBT4W

MODELLO

OOW04PA-T4W

SERIE

DIAMANTE 4.0



#### **GENERAL CHARACTERISTICS**

Diamond 90 Touch 4.0 - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from worktop adjustable from 840 to

900 mm. Tops with 2 mm thickness All model-identified equipment (T4W) is 4.0 Ready equipment, allowing you to benefit from all the advantages of connecting your equipment to a cloud system.

### **TECHNICAL SPECIFICATIONS**

■ O-RANGE W REFRIGERATED TABLES WITH 4.0 READY MOTOR ■ OLIS refrigerated tables are made with a state-of-the-art system to preserve food in a healthy way and ensure greater and overall efficiency of the facility. Automatic door closure with magnetic gasket ensures total safety, maximum quality and hygiene of every prepared product. ■ Moulded cell bottom with rounded edges and removable grid

supports for maximum hygiene and loading flexibility I Insulation thickness of 60 mm, made of high-density polyurethane foam, totally CFC-free I Ducted ventilation system to even out internal temperature

■ Environmentally friendly refrigerant R290





CODICE

BN26WC0212104LBT4W

MODELLO OOW04PA-T4W SERIE

DIAMANTE 4.0

### **Technical Information**

MATERIAL  BN26WC0212104LBT4W  DEFINITION  OOW04PA-T4W R290DX TNN PSPDPSPD C/A50SV  DIM. WIDTH  2190 mm  DIM. PRODUCTIVITY  700 mm  DIM. HEIGHT  810 mm  NET WEIGHT  117 Kg  PACKAGE LENGTH  2240 mm  PACKAGE WIDTH  750 mm  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  220-240V 1N  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  IPX4  Capacity  429	SPECIFICATION	DATA
DIM. WIDTH         2190 mm           DIM. PRODUCTIVITY         700 mm           DIM. HEIGHT         810 mm           NET WEIGHT         117 Kg           PACKAGE LENGTH         2240 mm           PACKAGE WIDTH         750 mm           PACKAGING HEIGHT         1060 mm           PACKAGE VOLUME         1,781 m3           GROSS PACKING WEIGHT         137 Kg           STANDARD POWER SUPPLY         220-240V 1N           FREQUENCY         50Hz           GAS/REFRIGERANT TYPE         R290           IP GRADE         IPX4	MATERIAL	BN26WC0212104LBT4W
DIM. PRODUCTIVITY  700 mm  DIM. HEIGHT  810 mm  NET WEIGHT  117 Kg  PACKAGE LENGTH  2240 mm  PACKAGE WIDTH  750 mm  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  41,781 m3  GROSS PACKING WEIGHT  50Hz  STANDARD POWER SUPPLY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  117 Kg	DEFINITION	OOW04PA-T4W R290DX TNN PSPDPSPD C/A50SV
DIM. HEIGHT  NET WEIGHT  117 Kg  PACKAGE LENGTH  2240 mm  PACKAGE WIDTH  750 mm  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  220-240V 1N  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  IP STANDARD POWER SUPPLY  IP STANDARD POWER SUPPLY  R290  IP STANDARD POWER SUPPLY  R290	DIM. WIDTH	2190 mm
NET WEIGHT  PACKAGE LENGTH  PACKAGE WIDTH  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  PREQUENCY  GAS/REFRIGERANT TYPE  R290  IP GRADE  117 Kg	DIM. PRODUCTIVITY	700 mm
PACKAGE LENGTH  PACKAGE WIDTH  750 mm  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  220-240V 1N  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  IP X4	DIM. HEIGHT	810 mm
PACKAGE WIDTH  PACKAGING HEIGHT  1060 mm  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  750 mm  750 mm  750 mm	NETWEIGHT	117 Kg
PACKAGING HEIGHT  PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  1060 mm  1,781 m3  220-240V 1N  57 NG  120-240V 1N  120-240V	PACKAGE LENGTH	2240 mm
PACKAGE VOLUME  1,781 m3  GROSS PACKING WEIGHT  137 Kg  STANDARD POWER SUPPLY  220-240V 1N  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  IPX4	PACKAGE WIDTH	750 mm
GROSS PACKING WEIGHT  STANDARD POWER SUPPLY  220-240V 1N  FREQUENCY  50Hz  GAS/REFRIGERANT TYPE  R290  IP GRADE  IPX4	PACKAGING HEIGHT	1060 mm
STANDARD POWER SUPPLY  FREQUENCY  GAS/REFRIGERANT TYPE  R290  IP GRADE  IPX4	PACKAGE VOLUME	1,781 m3
FREQUENCY 50Hz  GAS/REFRIGERANT TYPE R290  IP GRADE IPX4	GROSS PACKING WEIGHT	137 Kg
GAS/REFRIGERANT TYPE R290  IP GRADE IPX4	STANDARD POWER SUPPLY	220-240V 1N
IP GRADE IPX4	FREQUENCY	50Hz
	GAS/REFRIGERANT TYPE	R290
Capacity 429	IP GRADE	IPX4
	Capacity	429






CODICE

BN26WC0212104LBT4W

MODELLO OOW04PA-T4W SERIE
DIAMANTE 4.0

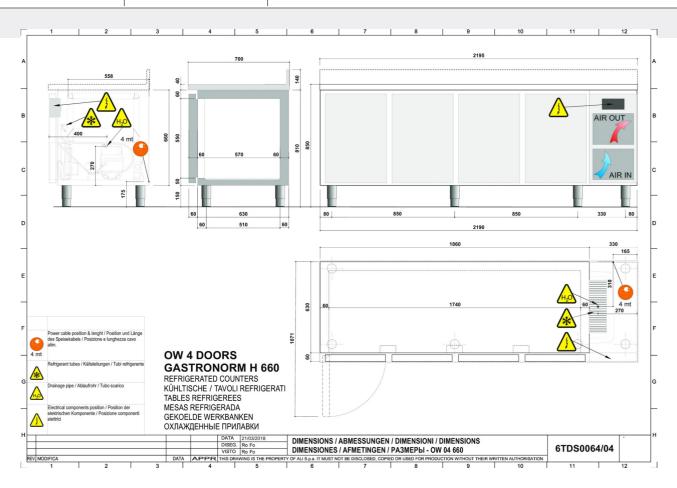





CODICE

MODELLO

SERIE

BN26WC0212104LBT4W OOW04PA-T4W

DIAMANTE 4.0

### **ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud

