

30 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K30 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

10kg
476 pcs

DIMENSIONS

L x P x H (mm)



400 x 545 x 690



460 x 600 x 850

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE	
		PESO GHIACCIO	
	Cubetto CAVO 30-36 29x 41x 32.5mm	20	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	28 62	27 60	25 55	22 48
21° 70°	26 57	24 53	22 48	19 42
32° 90°	22 48	20 44	18 40	15 33
38° 100°	18 40	17 37	15 33	12 26

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	27 60	26 57	25 55	22 48
21° 70°	26 57	25 55	24 53	21 46
32° 90°	25 55	24 53	23 51	20 44
38° 100°	22 48	21 46	20 44	18 40

TECHNICAL DATA



									
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg	Kg
K30 A AG 220-240V/1N/50Hz		354	190	10	21.3	2.47	32	39	
K30 W AG 220-240V/1N/50Hz		354	190	10	11.9	37.8	32	39	

DIMENSIONS

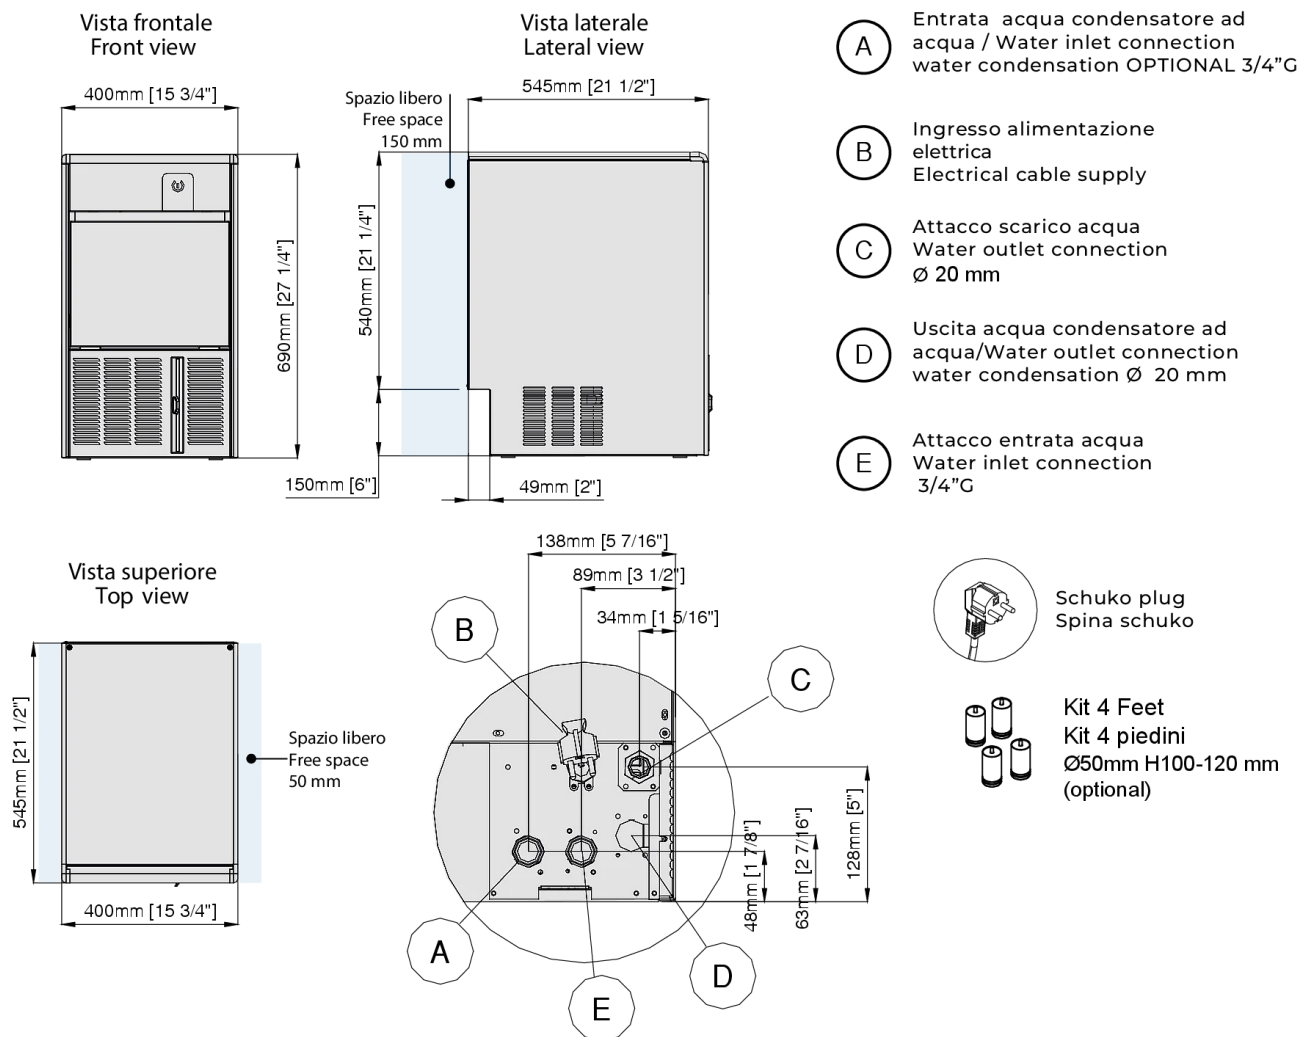


MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	514 W
Air Volume	300 m³/h