

130 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:

G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G130C ALLGAS

220-240/50/1

Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH



WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Removable and washable air filter
- Frontal air intake and exhaust



ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
 Cubetto Nugget M 15.8x 15x 7.7mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10°	130	125	121	112
50°	287	276	267	247
21°	118	116	112	103
70°	260	256	247	227
32°	98	95	91	85
90°	216	209	201	187
38°	83	81	77	71
100°	183	179	170	156

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10°	118	115	106	95
50°	260	253	234	209
21°	112	110	100	90
70°	247	242	220	198
32°	106	104	94	84
90°	234	229	207	185
38°	97	96	86	79
100°	214	212	190	174

OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

18 kg

DIMENSIONS

L x P x H (mm)



500 x 597 x 694



560 x 650 x 970

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

G130C AG 220-240/50/1N 634 570 10 14.2 4 50 57

G130C AG 220-240/50/1N 634 500 10 12.2 40 50 57

130 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G130C ALLGAS


220-240/50/1

Nugget Ice Makers

DIMENSIONS

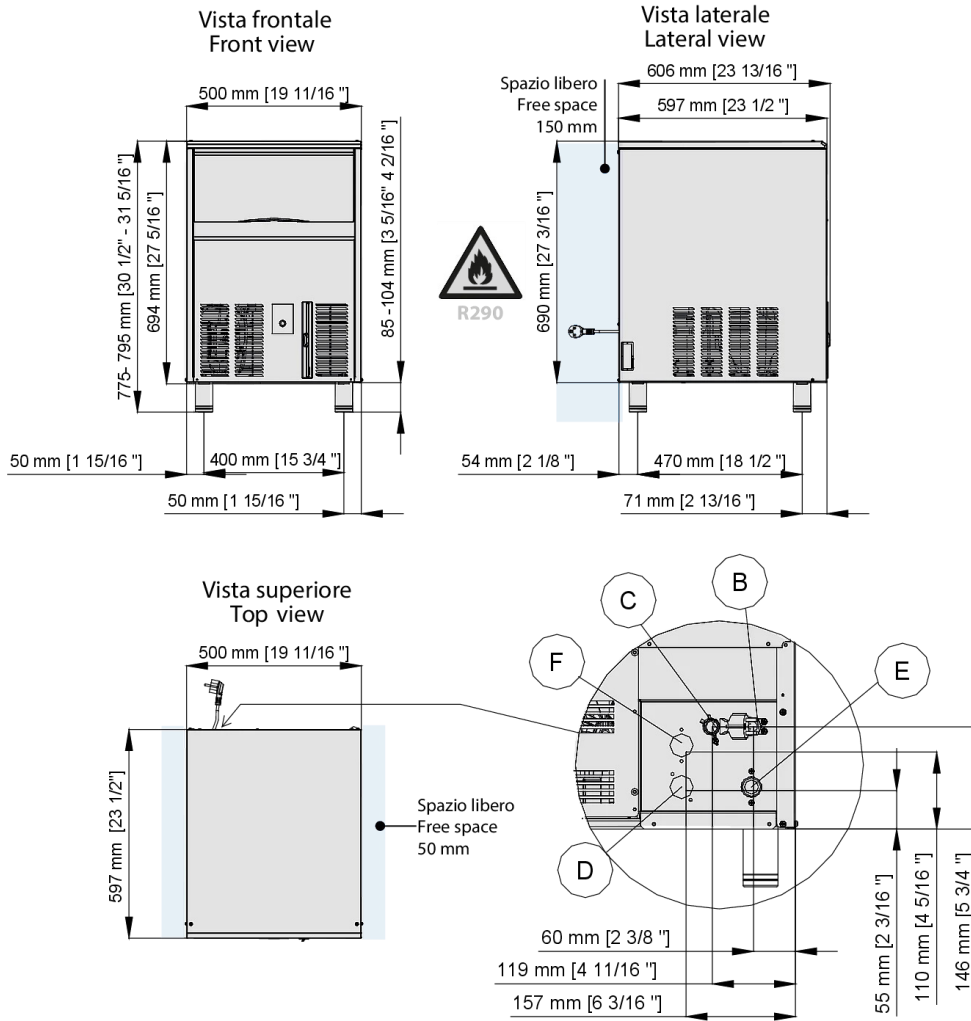

- (B)** Ingresso alimentazione elettrica / Electrical cable supply
- (C)** Attacco scarico acqua / Water outlet connection Ø 20 mm
- (D)** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- (E)** Attacco entrata acqua / Water inlet connection 3/4"G
- (F)** Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G



Schuko plug
Spina schuko






Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1707 W
Air Volume	300 m³/h