

XEFR-06EU-EGRN

| Project | |
|----------|--|
| Item | |
| Quantity | |
| Date | |

Model

BAKERLUX SHOP.Pro™ GO



Energy efficiency 17.5 kWh/day - 0 kg CO₂/day*

*More details on the last page.



Convection oven Electric 6 trays 600x400 Hinge on the left side Control panel with 7-segment display Manual opening Voltage: 380-415V 3N~ / 220-240V 3~

Description

Programmable easy-to-use convection oven, ideal for baking breakfast and snack products, in particular pastry and frozen bakery ones. The digital panel allows the storage of 99 programs with 3 cooking steps plus preheating, 12 of which with immediate access. Rounded stainless steel chamber to facilitate cleaning and ensure maximum hygiene.

Standard cooking features Manual cooking

• Temperature: 30 °C – 260 °C

• Up to 3 cooking steps

Programs

• 99 Programs

Advanced and automatic cooking features Unox Intensive Cooking

• DRY.Plus: rapidly extracts humidity from the cooking chamber


Key features


- Baking chamber made of high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Baking chamber lighting through LED lights embedded in the door
- Baking chamber with L-shaped rack rails







XEFR-06EU-EGRN

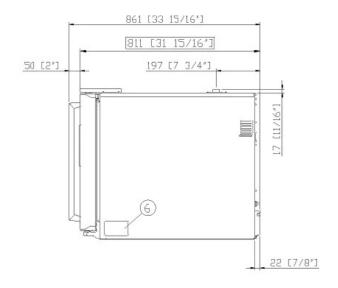

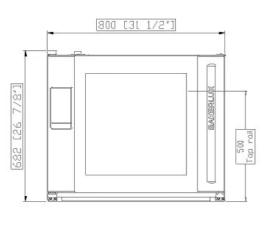

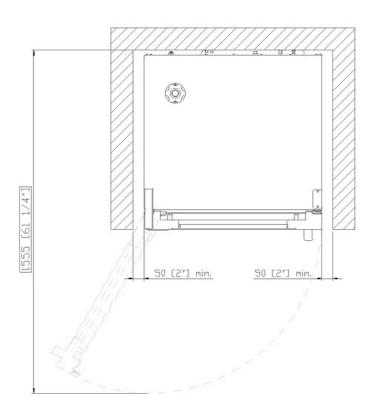

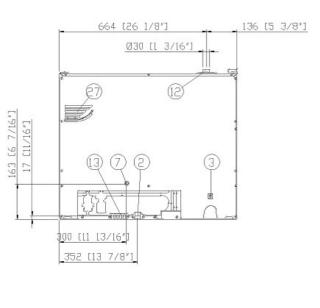

Dimensions and weight

| Width | 800 mm |
|------------|--------|
| Depth | 811 mm |
| Height | 682 mm |
| Net weight | 72 kg |
| Tray pitch | 75 mm |

Connection positions

| 2 | Terminal board power supply |
|----|-----------------------------|
| 3 | Unipotential terminal |
| 6 | Technical data plate |
| 7 | Safety thermostat |
| 12 | Hot fumes exhaust chimney |
| 27 | Cooling air outlet |



XEFR-06EU-EGRN

Electrical power supply

STANDARD

| SIANDARD | |
|---------------------------|---------------|
| Voltage | 380-415 V |
| Phase | ~3PH+N+PE |
| Frequency | 50 / 60 Hz |
| Total power | 10.3 kW |
| Max Amp draw | 17.5 A |
| Required breaker size | 20 A |
| Power cable requirements* | 5G x 2,5 mm^2 |
| Plug | NOT INCLUDED |
| OPTION A | |
| Voltage | 220-240 V |
| Phase | ~3PH+PE |
| Frequency | 50 / 60 Hz |
| Total power | 10.3 kW |
| Max Amp draw | 28 A |
| Required breaker size | 32 A |
| Power cable requirements* | 4G x 4 mm^2 |
| Plug | NOT INCLUDED |
| | |

^{*}Recommended size - observe local ordinance.

Energy efficiency

Consumption

CO₂ emission

**The estimate includes only direct emissions produced by the oven. Indirect emissions can be reduced to zero by choosing to purchase energy from renewable sources.

Estimate based on daily use of the oven (300 days/year):

6 light loads of roast chickens (loaded at 20%), 1 full load of roast potatoes, 3 full loads cooking with steam 2 hours in an empty oven at 180 $^{\circ}$ C.

Estimated assuming the following weekly washing programs (42 weeks/year):

1 long wash, 1 medium wash.

Accessories

- **Stand:** the multifunctional support ideal for storing trays safely and placing your oven at the perfect height to work
- Baking Essentials: special trays
- SPRAY&Rinse: Practical spray detergent to manually clean all kinds of oven. It degreases and removes all kind of dirt
- XUC153

Installation requirements

Installations must comply with all local electrical systems, particularly as for minimum wire gauge required for field connection, hydraulic and ventilation supply. Exhaust and fume analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications.