

## ELECTRIC BAIN-MARIE TOP

CODICE  
CR1139409

MODELLO  
DT94/10TCBE

SERIE  
DIAMANTE 90 TOUCH



### GENERAL CHARACTERISTICS

Diamond 90 Touch - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from the work surface adjustable from 840 to 900mm. Tops with 2 mm thickness

### TECHNICAL SPECIFICATIONS

■ Tank dimensions Gastro Norm. ■ Perforated false bottom for supporting containers. ■ Adjustable temperatures from 30° to 90°C. ■ Tub equipped with an overflow level. ■ Armoured heating elements positioned outside the tank. ■ Water loading by means of solenoid valve.

■ Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time. ■ Temperature control via touch screen and adjustment with ergonomic knob ■ Adjustable

temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC BAIN-MARIE TOP

CODICE  
CR1139409

MODELLO  
DT94/10TCBE

SERIE  
DIAMANTE 90 TOUCH

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR1139409
DEFINITION	DT94/10 TCBE BAGNOMARIA TOP M80 ELETTRON
COMMERCIAL LINE	DIAMANTE TOUCH
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	75 Kg
VOLUME (net)	0.18
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	980 mm
PACKAGING HEIGHT	520 mm
PACKAGE VOLUME	0,400 m3
GROSS PACKING WEIGHT	84 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5.4 kW
IP GRADE	IPX5
CERTIFIED MODEL	DT94/10 TCBE


CODICE  
CR1139409

MODELLO  
DT94/10TCBE

SERIE  
DIAMANTE 90 TOUCH

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

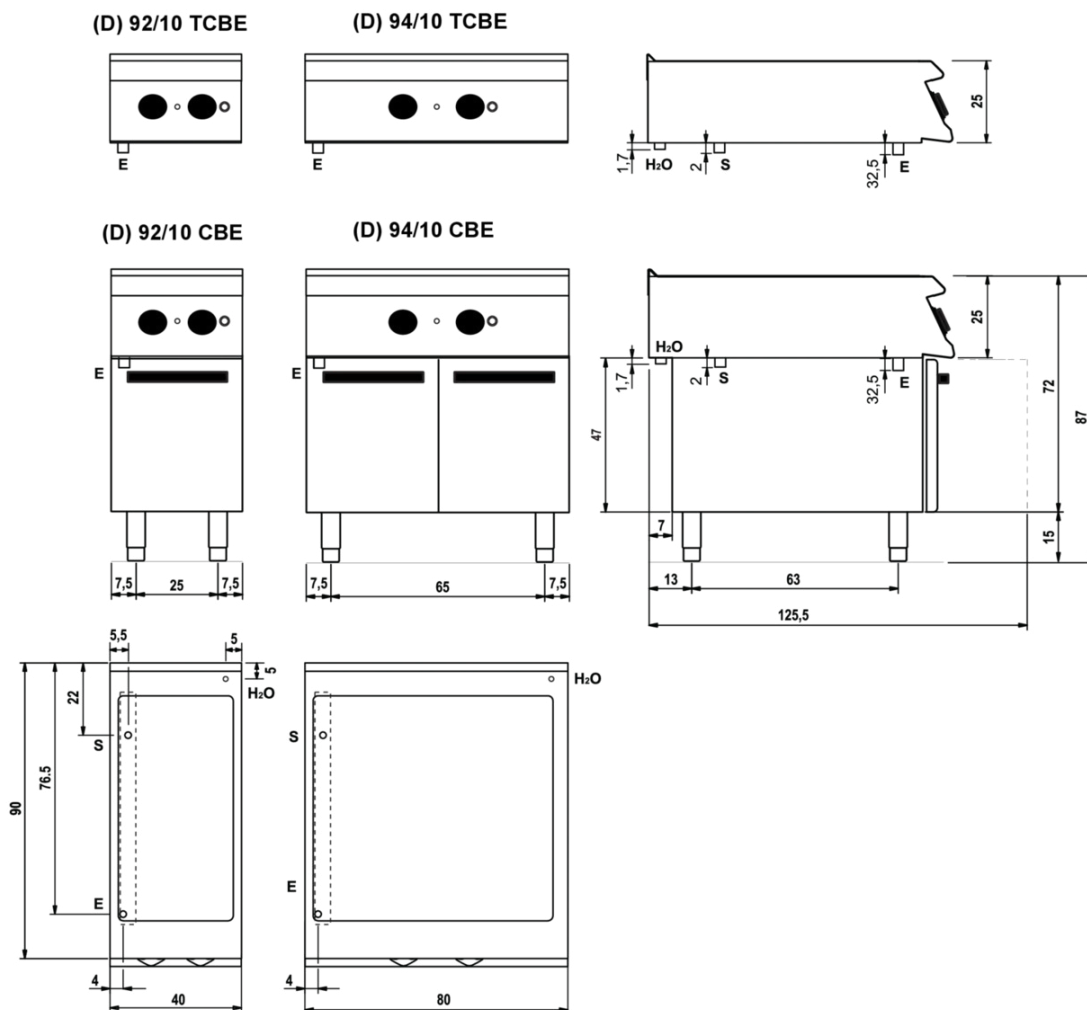

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Attacco scarico acqua - Wasserablauf - Water outlet  
Vidange de l'eau - Desaguadero - Wateraftapaansluiting  
**EN 10226-1 R 1/2**
- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 1/2**

## ELECTRIC BAIN-MARIE TOP

**CODICE**  
CR1139409

**MODELLO**  
DT94/10TCBE

**SERIE**  
DIAMANTE 90 TOUCH




Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.




Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Temperature control via touch screen and adjustment with ergonomic knob



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display.