CODICE CR1139489 MODELLO DT93/10KBEF SERIE DIAMANTE 90 TOUCH



GENERAL CHARACTERISTICS

Diamond 90 Touch - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from the work surface adjustable from 840 to 900mm. Tops with 2 mm thickness

*We*innovate cooking

TECHNICAL SPECIFICATIONS

■ Tank made entirely of AISI 304 steel. ■ Heating is achieved by means of armoured heating elements placed under the bottom of the tank. ■ The temperature, thermostatically controlled, is adjustable from 50 to 300°C

■ Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time. ■ Plate with armoured incoloy heating elements placed under the bottom for cooking with temperature uniformity. ■ Temperature control via touch screen and

adjustment with ergonomic knob I Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal. I Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. I Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR1139489 **MODELLO** DT93/10KBEF SERIE DIAMANTE 90 TOUCH

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1139489
DEFINITION	DT93/10 KBEF MULTIPLA M60 ELETTRON.
COMMERCIAL LINE	DIAMANTE TOUCH
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	60 Kg
VOLUME (net)	0.47
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	0,000 m3
GROSS PACKING WEIGHT	82 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8.1 kW
IP GRADE	IPX5
CERTIFIED MODEL	DT93/10 KBEF



to ISO 9001





CODICE CR1139489 MODELLO DT93/10KBEF SERIE DIAMANTE 90 TOUCH


SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

(D) 93/10 KBEF



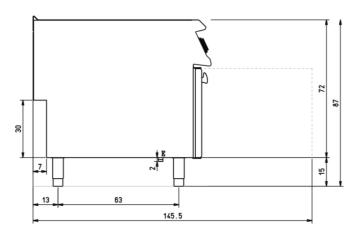



Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac - Descarga cuba - Water toevoer

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4

2



CODICE CR1139489 MODELLO DT93/10KBEF SERIE DIAMANTE 90 TOUCH



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.



Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display.

*We*innovate cooking



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display.



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal.

