

CODICE

MODELLO

SERIE

CR0991809

D95/10CGW28

**DIAMANTE 90** 



#### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

■ Table tops with 20/10 thickness with 55x52 cm or 95x52 cm storage space. ■ Right rear exhaust 22 mm in diameter, prepared for ground connection. ■ In the compartment area, full-width tray for collecting overflow liquids. ■ Fireplace for heat venting. ■ Stainless steel outer coatings and feet.

Height of the work surface adjustable from 840 to 900mm.

■ Enamelled cast iron ring burner, available in 10 or 14 kW, removable for easier cleaning. ■ Table top with standardised tank and liquid drainage in the rear right-hand corner. ■ Tray for collecting overflow liquids. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0991809 MODELLO

SERIE

D95/10CGW28

DIAMANTE 90

### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0991809
DEFINITION	D95/10CGW28 2 FUOC. WOK 28KW VANO GIORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	1000 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	115 Kg
VOLUME (net)	0.783
PACKAGE LENGTH	1250 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,462 m3
GROSS PACKING WEIGHT	124.4 Kg
GAS POWER	28
GAS POWER (G25.3/25mbar)	26,60
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	DUE FUOCHI
CERTIFIED MODEL	D95/10 CGW





CODICE

MODELLO


SERIE


CR0991809 D95/10CGW28

DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

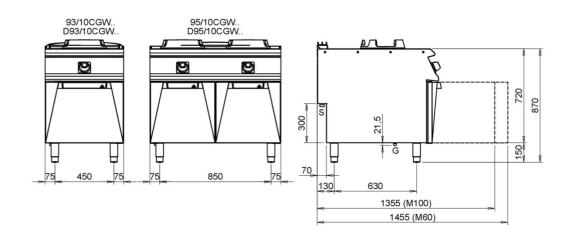



Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschuluss Gas connection Arrivée gaz Union de gas Gasaansluiting EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Scarico acqua Wasserablauf Water drain Evacuation eau Descarga de agua Afvoer water EN 10226-1 R 1







CODICE CR0991809 MODELLO D95/10CGW28

DIAMANTE 90

SERIE



10 kW or 14 kW enameled cast-iron burners removable for easy cleaning.



Table top with standardised tank and liquid drainage in the rear right-hand corner.



Tray for collecting overflow liquids.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



