

ELECTRIC SOLID TOP - TOP VERSION

CODICE
CR0990449

MODELLO
D94/10TCTE

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Cast iron centre plate and ring. ■ Piezoelectric ignition with liquid-protected push button. ■ Adjustable temperature on the plate from 50° to 450°C.

■ 4 independent cooking zones with 4 kW power each. ■ Cantilevered plate with perimeter grease trough with drain hole. ■ Equipment certified for low voltage directive 2014/35/EU according

to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety. ■ Thermostat for surface temperature regulation from 50 to 400°C, and with safety function for overtemperature protection. ■ Radiant plate size 710x710 mm thickness 18 mm made of steel with electrolytic hard chrome coating.

ELECTRIC SOLID TOP - TOP VERSION

CODICE
CR0990449

MODELLO
D94/10TCTE

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990449
DEFINITION	D94/10 TCTE TUTTAPIASTRA EL.TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	125 Kg
VOLUME (net)	0.18
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	0,400 m3
GROSS PACKING WEIGHT	132 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 TCTE

ELECTRIC SOLID TOP - TOP VERSION

CODICE
CR0990449



MODELLO
D94/10TCTE

SERIE
DIAMANTE 90




SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

(D) 94/10 TCTE

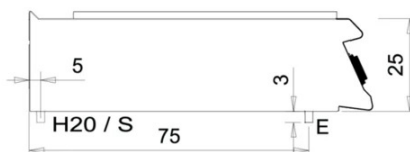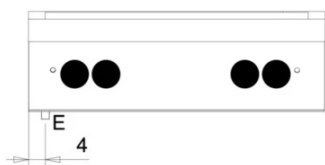

(D) 94/10 CTE

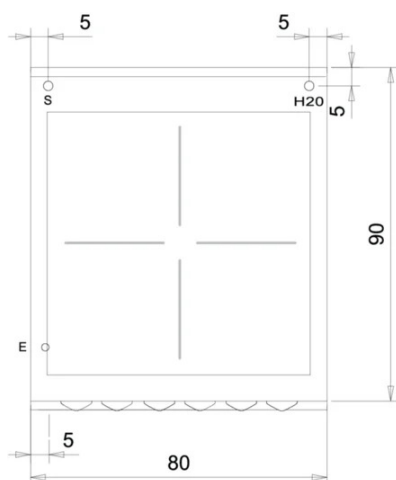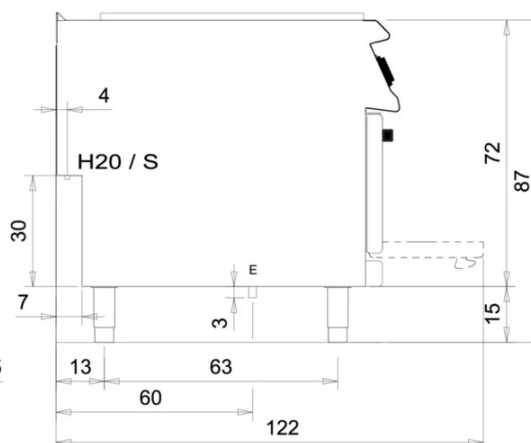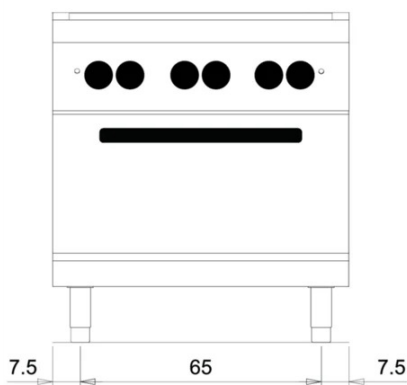

Legenda - Legende - Key
Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica
Stopfbuchse - Pisacable
Electric cable stress relief
Presse étoupe de câble él.
Elektrische kabelwartel

H20* Attacco arrivo acqua
Wasseranschluss - Water inlet
Arrivée eau - Union de agua
Wateraansluiting
EN ISO 228-1 G 1/2

S Attacco scarico acqua - Wasserablauf
Water outlet - Vidange de l'eau
Desaguadero - Wateraftapaansluiting
Ø = 30 mm

ELECTRIC SOLID TOP - TOP VERSION

CODICE
CR0990449

MODELLO
D94/10CTE

SERIE
DIAMANTE 90



4 independent cooking zones.



Cantilevered plate with perimeter
grease trough with drain hole.



Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.