DLIS *We*innovate cooking

CODICE CR0990649 **MODELLO** D94/10TVTC

SERIE DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Unbreakable ceramic glass top.

Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used. I Single zone power of 4 kW. I Temperature adjustable by thermostat from 70 to 450°C.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ A temperature regulator sets the temperature and this permits to

select two sizes of the heating zone according to the size of the pot bottom. I Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. I Thanks to the jetproofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0990649 **MODELLO** D94/10TVTC **SERIE** DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990649
DEFINITION	D94/10 TVTC VETROCERAMICA 4Z. TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NETWEIGHT	88 Kg
VOLUME (net)	0.18
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	0,400 m3
GROSS PACKING WEIGHT	97 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 TVTC







CODICE CR0990649 **MODELLO** D94/10TVTC **SERIE** DIAMANTE 90


SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

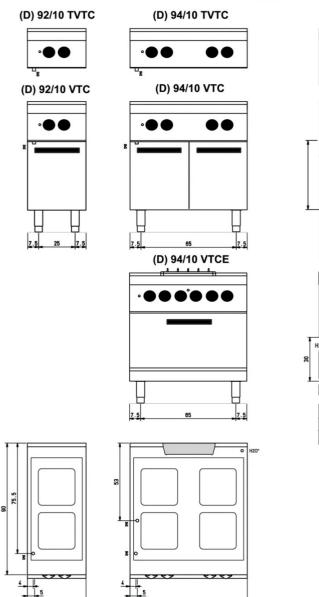

75.5 m





Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- H2O* Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 1/2

azienda associata

CODICE CR0990649 **MODELLO** D94/10TVTC **SERIE** DIAMANTE 90





Unbreakable flush-mounted glass for easy handling of pans.



A temperature regulator sets the temperature and this permits to select two sizes of the heating zone according to the size of the pot bottom.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

