

CODICE CR0990679 **MODELLO**D94/10VTCE

DIAMANTE 90

SERIE



#### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

■ Unbreakable ceramic glass top.

Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used.  $\blacksquare$  Single zone power of 4 kW.  $\blacksquare$  Temperature adjustable by thermostat from 70 to 450°C.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ A temperature regulator sets the temperature and this permits to

select two sizes of the heating zone according to the size of the pot bottom. If Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. If Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0990679 **MODELLO**D94/10VTCE

**SERIE**DIAMANTE 90

### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0990679
DEFINITION	D94/10 VTCE VETROCERAMICA 4Z. FORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	124.8 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	140 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	22 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 VTCE






CR0990679

**MODELLO**D94/10VTCE

DIAMANTE 90

**SERIE** 

### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

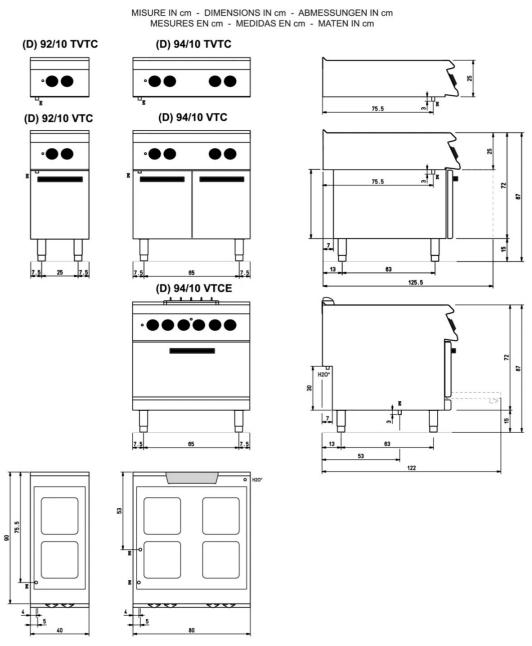

Legenda - Legende - Key - Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H2O\* Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 1/2







CODICE CR0990679 **MODELLO**D94/10VTCE

DIAMANTE 90

SERIE



Unbreakable flush-mounted glass for easy handling of pans.



A temperature regulator sets the temperature and this permits to select two sizes of the heating zone according to the size of the pot bottom.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



