

CODICE CR1358529 MODELLO
D94/10TCIITC

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

- Unbreakable glass-ceramic top. Serigraphs identifying cooking zones. Safety sensor to prevent overheating. Power adjustable to 12 levels Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.
- Ensures the correct positioning and suitability of the pot Power adjustable to 12 levels Professional components tested to withstand intensive use over time Safety sensor to prevent overheating. Cooking zones with 7KW power Mechanically controlled induction ready for IOT connection to Cloud Serigraphs identifying cooking zones.





CODICE CR1358529

MODELLO
D94/10TCIITC

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1358529
DEFINITION	D94/10 TCIITC INDUZIONE M80 TC TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	63 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,997 m3
GROSS PACKING WEIGHT	72.4 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	20 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 TCIITC






CODICE CR1358529 **MODELLO**D94/10TCIITC

SERIEDIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

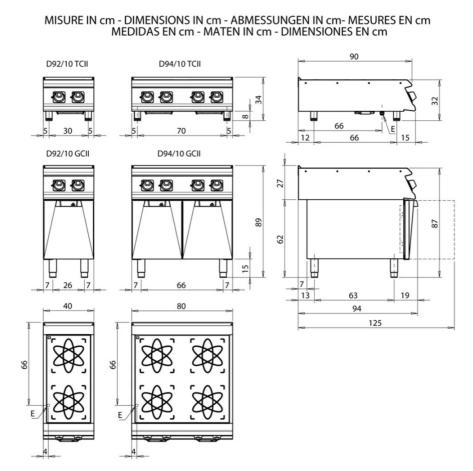

E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão	
S 3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de
S4	marmita com Sistema de aquecimento indirecto Scarico - Abflussrohr - Drain - Tuyau d'évacuation -	niveau - Grifo de nivel - Niveaukraan - Torneira de nível
	Tubo de drenaje - Aftapbuis - Tubulação de dreno	





CODICE CR1358529

MODELLO
D94/10TCIITC

DIAMANTE 90

SERIE



Power adjustable to 12 levels



Mechanically controlled induction ready for IOT connection to Cloud



Professional components tested to withstand intensive use over time



Safety sensor to prevent overheating.



Cooking zones with 5KW power



