

4-ZONE INDUCTION FULL SURFACE - ON OPEN CABINET

CODICE
CR1358549

MODELLO
D94/10GCIITC

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Unbreakable glass-ceramic top. ■ Serigraphs identifying cooking zones. ■ Safety sensor to prevent overheating. ■ Power adjustable to 12 levels ■ Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

■ Ensures the correct positioning and suitability of the pot ■ Power adjustable to 12 levels ■ Professional components tested to withstand intensive use over time ■ Safety sensor to prevent overheating. ■ Cooking zones with 7KW power ■ Mechanically controlled induction ready for IOT connection to Cloud ■ Serigraphs identifying cooking zones.

4-ZONE INDUCTION FULL SURFACE - ON OPEN CABINET

CODICE
CR1358549

MODELLO
D94/10GCIITC

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1358549
DEFINITION	D94/10 GCIITC INDUZIONE M80 TC A/G
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	83 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,997 m3
GROSS PACKING WEIGHT	92.8 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	20 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 GCIITC

4-ZONE INDUCTION FULL SURFACE - ON OPEN CABINET


CODICE
CR1358549

MODELLO
D94/10GCIITC

SERIE
DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

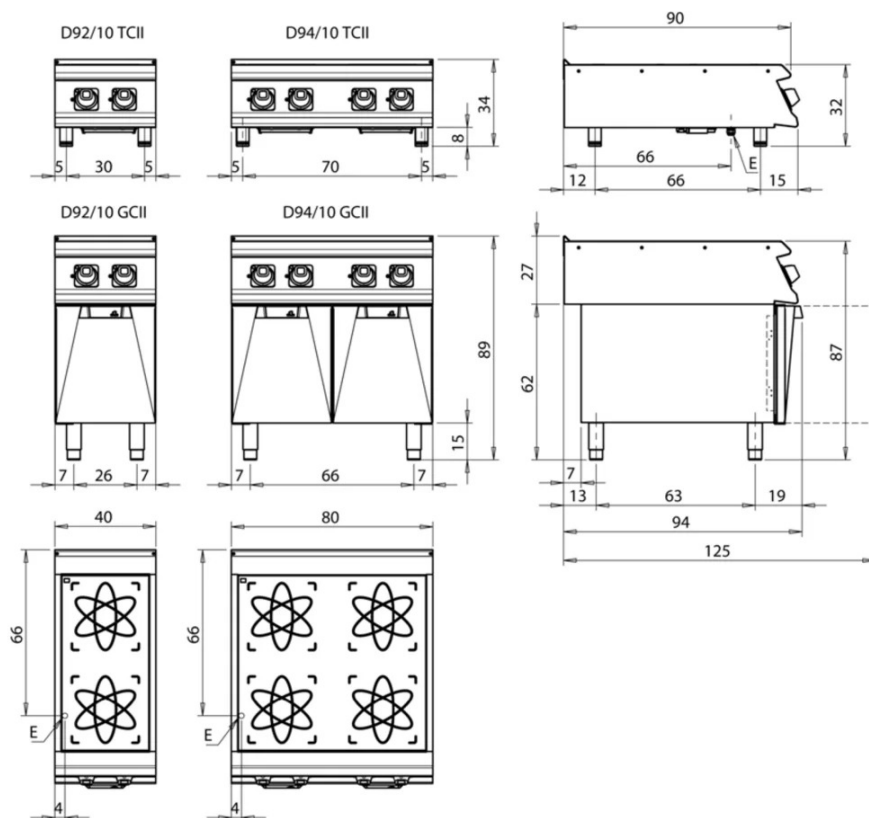

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

4-ZONE INDUCTION FULL SURFACE - ON OPEN CABINET

CODICE
CR1358549

MODELLO
D94/10GCIITC

SERIE
DIAMANTE 90



Power adjustable to 12 levels



Mechanically controlled induction
ready for IOT connection to Cloud



Professional components tested to
withstand intensive use over time



Safety sensor to prevent overheating.



Cooking zones with 5KW power