CODICE CR0991189 **MODELLO** D94/10TCBG

SERIE DIAMANTE 90





GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Tank dimensions Gastro Norm.

Perforated false bottom for vessel support.

Adjustable temperatures from 30° to 90°C.

Tank equipped with overflow level.

Gas version: burner controlled by thermostatic safety thermocouple valves and piezo ignition. I Electric version: armoured heating elements positioned outside the tank, water filling by means of solenoid valve.

■ Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Thanks to the jetproofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



CODICE CR0991189 **MODELLO** D94/10TCBG **SERIE** DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991189
DEFINITION	D94/10 TCBG BAGNOMARIA GAS TOP M80
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NETWEIGHT	45 Kg
VOLUME (net)	0.18
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	550 mm
PACKAGE VOLUME	0,476 m3
GROSS PACKING WEIGHT	55 Kg
GAS POWER	6
GAS POWER (G25.3/25mbar)	5,50
CERTIFIED MODEL	D94/10 TCBG









CIS Weinnovate cooking

5

CODICE CR0991189 **MODELLO** D94/10TCBG **SERIE** DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR



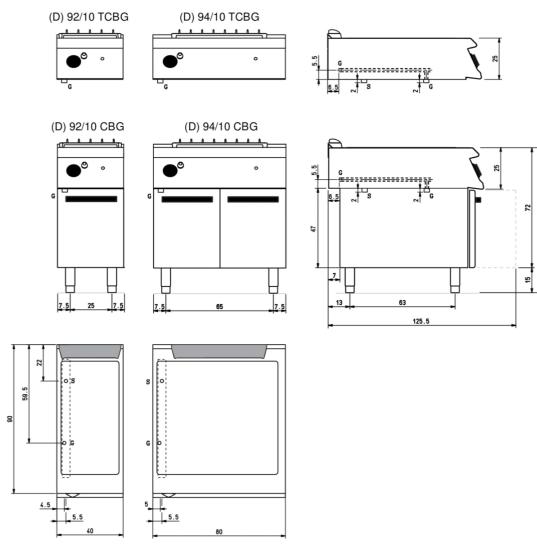


Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226-1 R 1/2 ; EN ISO 228-1 G 1/2 (DK)
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1/2



CODICE CR0991189 **MODELLO** D94/10TCBG **SERIE** DIAMANTE 90





Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

