GAS BAIN-MARIE ON CABINET



CR0991229

MODELLOD94/10CBG

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Tank dimensions Gastro Norm.

Perforated false bottom for vessel support.

Adjustable temperatures from 30° to 90°C.

Tank equipped with overflow level.

Gas version: burner controlled by thermostatic safety thermocouple valves and piezo ignition. • Electric version: armoured heating elements positioned outside the tank, water filling by means of solenoid valve.

■ Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



GAS BAIN-MARIE ON CABINET



CODICE CR0991229 **MODELLO**D94/10CBG

SERIE
DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991229
DEFINITION	D94/10 CBG BAGNOMARIA GAS M80 VANO G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	66 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	76 Kg
GAS POWER	6
GAS POWER (G25.3/25mbar)	5,50
CERTIFIED MODEL	D94/10 CBG






CODICE CR0991229 **MODELLO**D94/10CBG

SERIE
DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

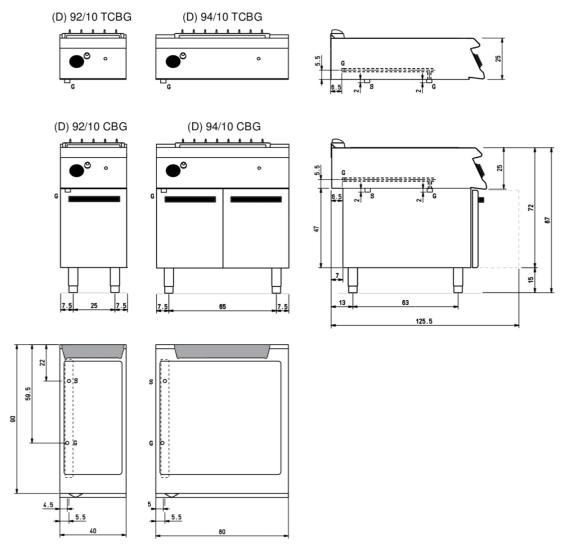

Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1/2





Web: olis.it - Mail: info@olis.it

GAS BAIN-MARIE ON CABINET



CODICE CR0991229 **MODELLO**D94/10CBG

DIAMANTE 90

SERIE



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



