

CR0991199

MODELLOD92/10TCBE

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Tank dimensions Gastro Norm.

Perforated false bottom for vessel support.

Adjustable temperatures from 30° to 90°C.

Tank equipped with overflow level.

Gas version: burner controlled by thermostatic safety thermocouple valves and piezo ignition. • Electric version: armoured heating elements positioned outside the tank, water filling by means of solenoid valve.

■ Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time. ■ Temperature control via touch screen and adjustment with ergonomic knob ■ Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and underknobs can be washed, without compromising functionality and safety.





CODICE CR0991199 MODELLO
D92/10TCBE

SERIEDIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991199
DEFINITION	D92/10 TCBE BAGNOMARIA EL. TOP M40
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NETWEIGHT	24 Kg
VOLUME (net)	0.09
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	5520 mm
PACKAGE VOLUME	0,248 m3
GROSS PACKING WEIGHT	32 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	1.8 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10 TCBE






CODICEMODELLOSERIECR0991199D92/10TCBEDIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

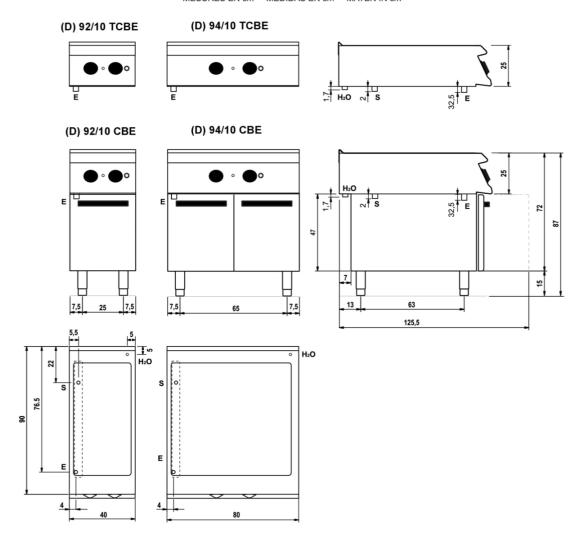

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau Desaguadero Wateraftapaansluiting EN 10226-1 R 1/2
- H2O Attacco arrivo acqua Wasseranschluss Water inlet
 Arrivée eau Union de agua Wateraansluiting
 EN ISO 228-1 G 1/2





1



CODICE CR0991199 **MODELLO**D92/10TCBE

SERIE DIAMANTE 90



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.



Temperature control via touch screen and adjustment with ergonomic knob



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



