

# ELECTRIC BAIN-MARIE ON CABINET

CODICE  
CR0991239

MODELLO  
D92/10CBE

SERIE  
DIAMANTE 90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

■ Tank dimensions Gastro Norm.

Perforated false bottom for vessel support.

Adjustable temperatures from 30° to 90°C.

Tank equipped with overflow level.

Gas version: burner controlled by thermostatic safety thermocouple valves and piezo ignition. ■ Electric version: armoured heating elements positioned outside the tank, water filling by means of solenoid valve.

■ Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## ELECTRIC BAIN-MARIE ON CABINET

CODICE  
CR0991239

MODELLO  
D92/10CBE

SERIE  
DIAMANTE 90

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991239
DEFINITION	D92/10 CBE BAGNOMARIA EL. M40 VANO G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	34 Kg
VOLUME (net)	0.313
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,522 m3
GROSS PACKING WEIGHT	46.3 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	1.8 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10 CBE

# ELECTRIC BAIN-MARIE ON CABINET


CODICE  
CR0991239

MODELLO  
D92/10CBE

SERIE  
DIAMANTE 90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

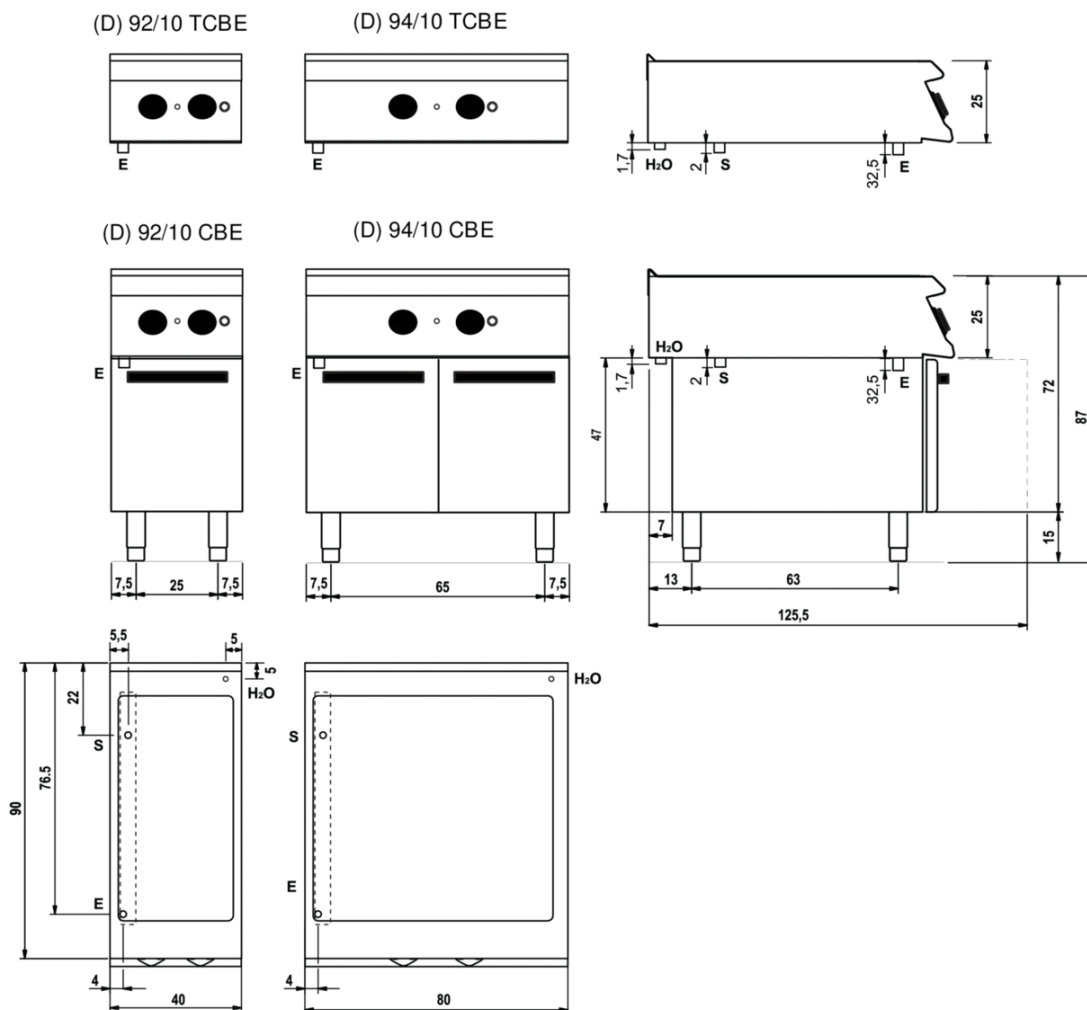

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Attacco scarico acqua - Wasserablauf - Water outlet  
Vidange de l'eau - Desaguadero - Wateraftapaansluiting  
**EN 10226-1 R 1/2**
- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 1/2**

## ELECTRIC BAIN-MARIE ON CABINET

CODICE  
CR0991239

MODELLO  
D92/10CBE

SERIE  
DIAMANTE 90



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.