#### **Version - Thermostat**

□LIS

Weinnovate cooking

CODICE CR1651669 **MODELLO**D94/10TSFTTGCR

DIAMANTE 90

SERIE



### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

- 15 mm thick cooking plate totally independent of the hob. Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. Large grease collection drawer. Uniform baking temperature over the entire plate. Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. Plate not welded to the machine bed with optimisation of structural points under thermal stress Stainless steel overflow plug, supplied as an accessory, for channel flooding management Plate not welded to the machine bed with optimisation of structural points under thermal stress New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions Tubular burner with self-stabilising flame with great uniformity of heat distribution.
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food Large fat collection drawer with capacity of the entire volume of the perimeter channel Grooved plate design ensures cleanliness right to the end of the plate Plate not welded to the machine bed with optimisation of structural points under thermal stress Plate not welded to the machine bed with optimisation of structural points under thermal stress Thermal cutting that facilitates the user and adjacent machinery. Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. Water dispenser kit available as an accessory



### **Version - Thermostat**



**CODICE** CR1651669

**MODELLO**D94/10TSFTTGCR

SERIE
DIAMANTE 90

### **Technical Information**

SPECIFICATION	DATA	
MATERIAL	CR1651669	
DEFINITION	D94/10TSFTTGCR FTG RIGATO CROM. M80 TOP	
COMMERCIAL LINE	DIAMANTE	
SUPPLY	GAS	
DIM. WIDTH	800 mm	
DIM. PRODUCTIVITY	900 mm	
DIM. HEIGHT	250 mm	
NETWEIGHT	98 Kg	
VOLUME (net)	0.18	
PACKAGE LENGTH	840 mm	
PACKAGE WIDTH	1020 mm	
PACKAGING HEIGHT	550 mm	
PACKAGE VOLUME	0,476 m3	
GROSS PACKING WEIGHT	108 Kg	
GAS POWER	20	
GAS POWER (G25.3/25mbar)	20,00	
CERTIFIED MODEL	D94/10TSFTTG	



### **Version - Thermostat**

OLIS

Weinnovate cooking


CODICE CR1651669

D94/10TSFTTGCR

DIAMANTE 90

**SERIE** 

## MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

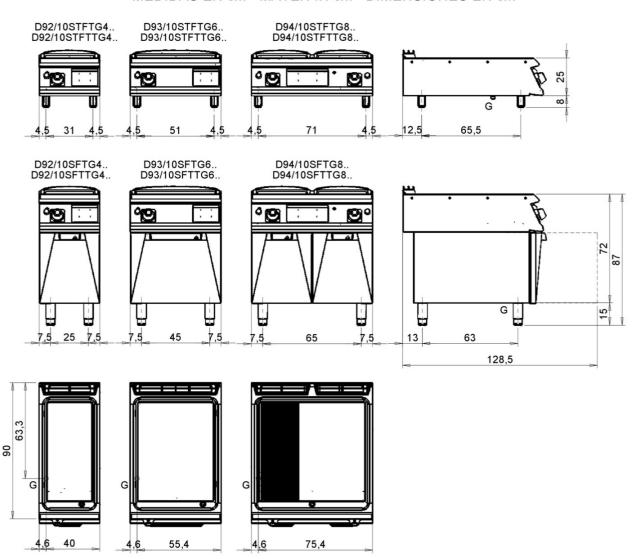

	Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda				
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)		
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água		
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba		Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio		
S2	G Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão				
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto				
			Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível		
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno				





### **Version - Thermostat**



**CODICE** CR1651669

**MODELLO**D94/10TSFTTGCR

DIAMANTE 90

SERIE



Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Water dispenser kit available as an accessory







**CODICE** CR1651669

**MODELLO**D94/10TSFTTGCR

DIAMANTE 90

SERIE

### **ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658629	D97CPFT68	Fry top cleaning drawer M60 - M80
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658689	9AFT8	M80 splash guard
CR1659249	PAFT8	M80 SUPER FRY TOP ACCESSORY HOLDER
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1659269	AGMFT6	HOLDING GRID FOR FRY TOP
CR1658709	D7968CAFT	WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC
CR1659059	D98GKSCFT	CONTINUOUS EXHAUST FOR FRY TOP M80 - D90 - GAS
CR1659089	D98GCSCFT	CONTINUOUS LOAD + SCAR.FOR FRY TOP M80 - D90 - GAS

