

CODICECR1770349

MODELLOD94/10TSFTTGCS

DIAMANTE 90

SERIE



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ 15 mm thick cooking plate totally independent of the hob. ■ Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. ■ Large grease collection drawer. ■ Uniform baking temperature over the entire plate. ■ Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Stainless steel overflow plug, supplied as an accessory, for channel flooding management ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ New version with identical cooking surface area and reduced energy output. ■ An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions ■ Tubular burner with self-stabilising flame with great uniformity of heat distribution.

■ Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food • Large fat collection drawer with capacity of the entire volume of the perimeter channel ■ Grooved plate design ensures cleanliness right to the end of the plate ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Thermal cutting that facilitates the user and adjacent machinery. ■ Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. ■ Water dispenser kit available as an accessory ■ Brushed Chrome Cooking Plate, the innovative chrome plating technology adopted combines the strength of steel plates with the anti-oxidant properties of chrome plates, resulting in a slightly rough surface that improves resistance to cuts and bumps. Metal tools can be used directly on the plate without risking damage.





CODICE

MODELLO

SERIE

CR1770349 D94/10TSFTTGCS

DIAMANTE 90

Technical Information

| SPECIFICATION | DATA |
|--------------------------|--------------|
| MATERIAL | CR1770349 |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | GAS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 250 mm |
| NET WEIGHT | 98 Kg |
| VOLUME (net) | 0.18 |
| PACKAGE LENGTH | 840 mm |
| PACKAGE WIDTH | 1020 mm |
| PACKAGING HEIGHT | 550 mm |
| PACKAGE VOLUME | 0,476 m3 |
| GROSS PACKING WEIGHT | 108 Kg |
| GAS POWER | 20 |
| GAS POWER (G25.3/25mbar) | 20,00 |
| CERTIFIED MODEL | D94/10TSFTTG |
| | |



FRY TOP S GAS M80 Brushed Chrome Plate -


Smooth - Thermostat Top Version



CODICE CR1770349 **MODELLO**D94/10TSFTTGCS

SERIE
DIAMANTE 90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

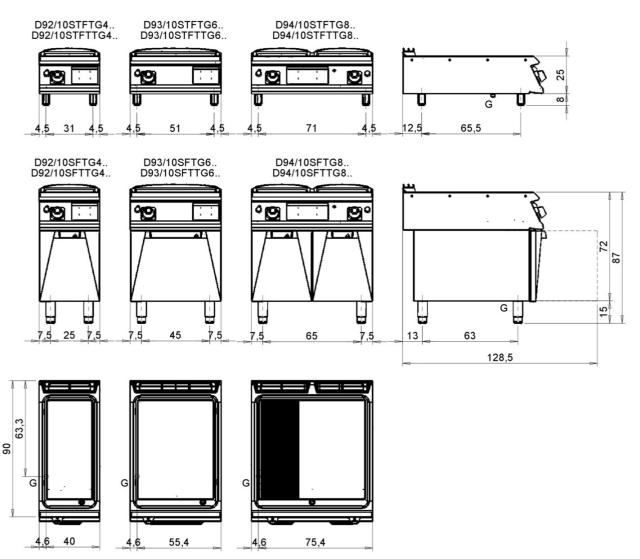

| | Legenda - Legende - Key - Légende - Leyenda - Legenda | | | | |
|---------|--|-----|--|--|--|
| E | Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G | Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK) | | |
| S | Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água | H20 | Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água | | |
| S1 | Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | | Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio | | |
| S2 | Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão | | | | |
| w ir | Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto | | | | |
| | | | Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível | | |
| S4 | Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno | | | | |







CODICE CR1770349 MODELLO
D94/10TSFTTGCS

SERIE
DIAMANTE 90



Brushed chrome plate surface designed to resist scratches and facilitate daily cleaning. complies with Regulation (EC) No. 1935/2004



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food





Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.







CODICE CR1770349 MODELLO

SERIE

D94/10TSFTTGCS DIAMANTE 90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|-----------|-----------|---|
| CR1354989 | PRPC | Smooth plate cleaning scraper - chrome-plated |
| CR1356399 | RPR | Striped chrome plate scraper |
| CR1658629 | D97CPFT68 | Fry top cleaning drawer M60 - M80 |
| CR1658609 | 97TFT | Plancha cleaning cap |
| CR1354999 | PKLR | Replacement blades (10PCS) |
| CR1658689 | 9AFT8 | M80 splash guard |
| CR1659249 | PAFT8 | M80 SUPER FRY TOP ACCESSORY HOLDER |
| CR1659379 | AKBFT-3 | KIT 1 BASIN GN1/3 H65 MM |
| CR1659369 | AKBFT-2 | KIT 2 BOWLS GN1/6 H65 MM |
| CR1659359 | AKBFT-1 | KIT 3 BOWLS GN1/9 H65 MM |
| CR1659259 | AGMFT48 | HOLDING GRID FOR FRY TOP |
| CR1659269 | AGMFT6 | HOLDING GRID FOR FRY TOP |
| CR1658709 | D7968CAFT | WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC |
| CR1659059 | D98GKSCFT | CONTINUOUS EXHAUST FOR FRY TOP M80 - D90 - GAS |
| CR1659089 | D98GCSCFT | CONTINUOUS LOAD + SCAR.FOR FRY TOP M80 - D90 - GAS |

