

CR0996159

MODELLO

SERIE

D96/10FTTGC DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

- Cooking plate lowered from the plane by 4 cm and tilted 1 cm toward the front of the machine for grease drainage. Tops with 2 mm thickness Plates inclined by 10mm towards the front of the machine. Large grease collection drawer Tubular burner with self-stabilising
- Large grease collection drawer. Tubular burner with self-stabilising flame with great uniformity of heat distribution.
- A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray. Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas. Even heat distribution thanks to several burners under the hotplate. Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and underknobs can be washed, without compromising functionality and safety.





CODICE CR0996159 **MODELLO**D96/10FTTGC

SERIE

DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0996159
DEFINITION	D96/10 FTTGC FRY TOP GAS LC M120 VANO G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	140 Kg
VOLUME (net)	0.94
PACKAGE LENGTH	1260 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,480 m3
GROSS PACKING WEIGHT	168 Kg
GAS POWER	31.5
GAS POWER (G25.3/25mbar)	30,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
CERTIFIED MODEL	D96/10 FTTGC





CODICE

CR0996159

MODELLO


D96/10FTTGC

DIAMANTE 90

SERIE

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

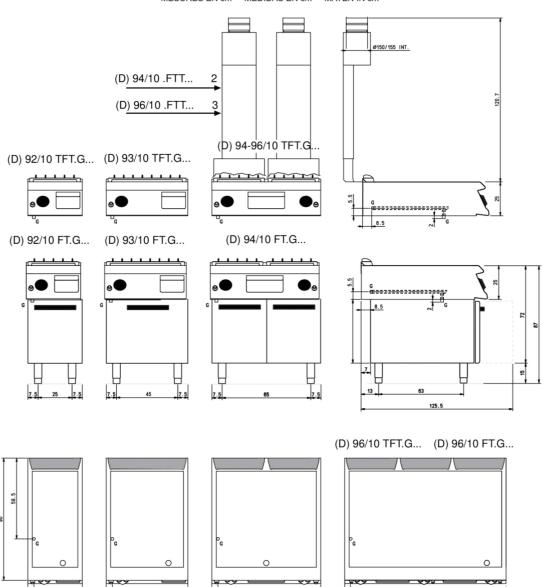

Legenda - Legende - Key - Légende - Leyenda - Legenda

4.5

4.5

4.5

G Attacco arrivo gas - Gasanschluss - Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226–1 R 1/2; EN ISO 228-1 G 1/2 (DK)





4.5



CODICE CR0996159 **MODELLO**D96/10FTTGC

DIAMANTE 90

SERIE



A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray.



Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.



Even heat distribution thanks to several burners under the hotplate.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.







CODICE

MODELLO

SERIE

CR0996159 D96/10FTTGC

DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0957610	90XFTP12	SPLASH GUARD FOR FRY TOP MODULE 120
CR0592060	NXFTT	PLANCHA CLEANING PLUG
CR0592089	NXFTC6/8	Fry top cleaning drawer M40-M60-M80-M120
CR0592079	NXFTC4	Fry top cleaning drawer M40-M120
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1354999	PKLR	Replacement blades (10PCS)

