FRY TOP S Electric M80 AISI Plate - RIBBED -

Thermostat Top Version

Weinnovate cooking

CODICE CR1652469 MODELLO D94/10TSFTFAR

DIAMANTE 90

SERIE



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

- 15 mm thick cooking plate totally independent of the hob . Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. ■ Large grease collection drawer. ■ Uniform baking temperature over the entire plate. • Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Stainless steel overflow plug, supplied as an accessory, for channel flooding management ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress I New version with identical cooking surface area and reduced energy output. ■ An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food • Large fat collection drawer with capacity of the entire volume of the perimeter channel ■ Grooved plate design ensures cleanliness right to the end of the plate ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Thermal cutting that facilitates the user and adjacent machinery. ■ Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. ■ Water dispenser kit available as an accessory



FRY TOP S Electric M80 AISI Plate - RIBBED - Thermostat Top Version



CODICE CR1652469

MODELLO D94/10TSFTEAR **SERIE**DIAMANTE 90

Technical Information

SPECIFICATION	DATA	
MATERIAL	CR1652469	
DEFINITION	D94/10TSFTEAR FTE RIGATO 430 M80 TOP	
COMMERCIAL LINE	DIAMANTE	
UPPLY ELECTRICS		
DIM. WIDTH	800 mm	
DIM. PRODUCTIVITY	900 mm	
DIM. HEIGHT	250 mm	
NETWEIGHT	88 Kg	
VOLUME (net)	0.18	
PACKAGE LENGTH	840 mm	
PACKAGE WIDTH	850 mm	
PACKAGING HEIGHT	550 mm	
PACKAGE VOLUME	0,396 m3	
GROSS PACKING WEIGHT	101.8 Kg	
STANDARD POWER SUPPLY	380-415V 3N	
FREQUENCY	50-60 Hz	
ELECTRICAL POWER	15 kW	
IP GRADE	IPX5	
CERTIFIED MODEL	D94/10TSFTEAR	



FRY TOP S Electric M80 AISI Plate - RIBBED -

Thermostat Top Version




CODICE CR1652469

MODELLO

SERIE

D94/10TSFTEAR DIAMANTE 90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

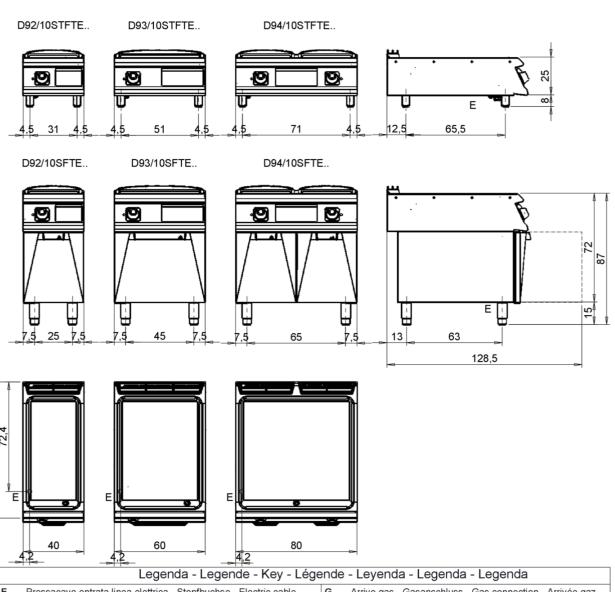

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
- G Arrivo gas Gasanschluss Gas connection Arrivée gaz Union de gas Gasaansluiting Ligação gás
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- H20 Arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
- S1 Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac Descarga cuba Water toevoer Descarga da cuba
- A1 = Calda Heiss Warm Chaude Caliente Warm Morno
- S2 Valvola di depressione Anti-depression valve Unterdruck ventil Soupape de dépression Válvula de dépresión Onderdrukklep Válvula de depressão
- A2 = Fredda Kalt Cold Froid Fria Koude Frio
- S3 Scarico acqua intercapedine Wasserablauf Zwischenraum Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
- Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível





90

FRY TOP S Electric M80 AISI Plate - RIBBED -





CODICE CR1652469

MODELLOD94/10TSFTEAR

DIAMANTE 90

SERIE



Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Water dispenser kit available as an accessory



FRY TOP S Electric M80 AISI Plate - RIBBED - Thermostat Top Version



CODICE CR1652469

MODELLO D94/10TSFTEAR SERIE
DIAMANTE 90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658629	D97CPFT68	Fry top cleaning drawer M60 - M80
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658689	9AFT8	M80 splash guard
CR1659249	PAFT8	M80 SUPER FRY TOP ACCESSORY HOLDER
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1659269	AGMFT6	HOLDING GRID FOR FRY TOP
CR1658709	D7968CAFT	WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC
CR1658799	D98EKSCFT	CONTINUOUS DISCHARGE FOR FRY TOP M80 - D90 - ELECTRIC
CR1658829	D98ECSCFT	LOAD + SCAR.CONTINUOUS FOR FRY TOP M80 - D90 - ELECTRIC

