## - thermostat - on open cabinet



CODICE CR1652369 **MODELLO**D93/10SFTEC1/3R

SERIE
DIAMANTE 90



#### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

- 15 mm thick cooking plate totally independent of the hob. Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. Large grease collection drawer. Uniform baking temperature over the entire plate. Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. Plate not welded to the machine bed with optimisation of structural points under thermal stress Stainless steel overflow plug, supplied as an accessory, for channel flooding management Plate not welded to the machine bed with optimisation of structural points under thermal stress New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food Large fat collection drawer with capacity of the entire volume of the perimeter channel Grooved plate design ensures cleanliness right to the end of the plate Plate not welded to the machine bed with optimisation of structural points under thermal stress Plate not welded to the machine bed with optimisation of structural points under thermal stress Thermal cutting that facilitates the user and adjacent machinery. Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. Water dispenser kit available as an accessory



# - thermostat - on open cabinet



**CODICE** CR1652369

MODELLO
D93/10SFTEC1/3R

SERIE
DIAMANTE 90

### **Technical Information**

SPECIFICATION	DATA	
MATERIAL	CR1652369	
DEFINITION	D93/10SFTEC1/3R FTE 1/3RC M60 A/G	
COMMERCIAL LINE	DIAMANTE	
SUPPLY	ELECTRICS	
DIM. WIDTH	600 mm	
DIM. PRODUCTIVITY	900 mm	
DIM. HEIGHT	870 mm	
NETWEIGHT	22 Kg	
VOLUME (net)	0.47	
PACKAGE LENGTH	640 mm	
PACKAGE WIDTH	890 mm	
PACKAGING HEIGHT	1230 mm	
PACKAGE VOLUME	0,702 m3	
GROSS PACKING WEIGHT	29 Kg	
STANDARD POWER SUPPLY	380-415V 3N	
FREQUENCY	50-60 Hz	
ELECTRICAL POWER	7.5 kW	
IP GRADE	IPX5	
CERTIFIED MODEL	D93/10SFTEC1/3R	



## - thermostat - on open cabinet




CODICE CR1652369 MODELLO D93/10SFTEC1/3R

DIAMANTE 90

SERIE

#### MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

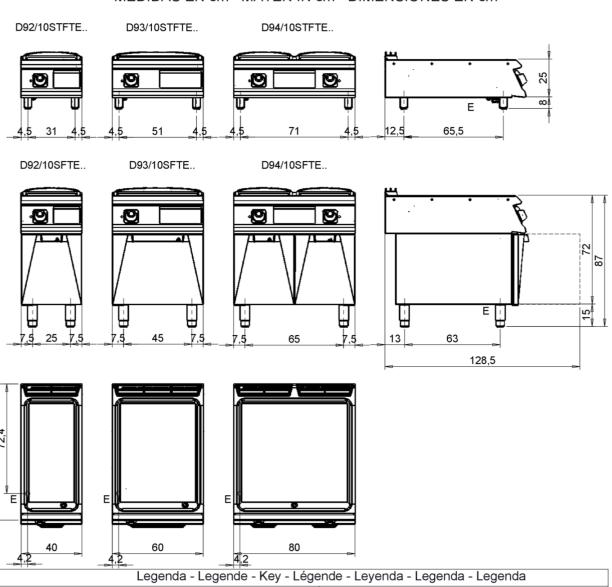

- Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
- Arrivo gas Gasanschluss Gas connection Arrivée gaz -Union de gas - Gasaansluiting - Ligação gás
- Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
- Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac -**S1** Descarga cuba - Water toevoer - Descarga da cuba
- A1 = Calda Heiss Warm Chaude Caliente Warm Morno
- Valvola di depressione Anti-depression valve Unterdruck ventil -Soupape de dépression - Válvula de dépresión - Onderdrukklep -Válvula de depressão
- A2 = Fredda Kalt Cold Froid Fria Koude Frio
- S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
- Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível





90

## - thermostat - on open cabinet



**CODICE** CR1652369

MODELLO
D93/10SFTEC1/3R

DIAMANTE 90

SERIE




Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Water dispenser kit available as an accessory





# - thermostat - on open cabinet



**CODICE** CR1652369

MODELLO
D93/10SFTEC1/3R

DIAMANTE 90

SERIE

#### **ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658629	D97CPFT68	Fry top cleaning drawer M60 - M80
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658679	9AFT6	SPLASH GUARD FOR FRY TOP MODULE 600
CR1659239	PAFT6	SUPER FRY TOP ACCESSORY HOLDER M60
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1659269	AGMFT6	HOLDING GRID FOR FRY TOP
CR1658709	D7968CAFT	WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC
CR1658789	D96EKSCFT	CONTINUOUS DISCHARGE FOR FRY TOP M60 - D90 - ELECTRIC
CR1658819	D96ECSCFT	LOAD + SCAR.CONTINUOUS FOR FRY TOP M60 - D90 - ELECTRIC

