

**CODICE**CR1770489

MODELLO
D92/10TSFTECS

SERIE
DIAMANTE 90



### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

- 15 mm thick cooking plate totally independent of the hob. Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. Large grease collection drawer. Uniform baking temperature over the entire plate. Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. Plate not welded to the machine bed with optimisation of structural points under thermal stress Stainless steel overflow plug, supplied as an accessory, for channel flooding management Plate not welded to the machine bed with optimisation of structural points under thermal stress New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention

of moisture in cooking food • Large fat collection drawer with capacity of the entire volume of the perimeter channel • Grooved plate design ensures cleanliness right to the end of the plate • Plate not welded to the machine bed with optimisation of structural points under thermal stress • Plate not welded to the machine bed with optimisation of structural points under thermal stress • Thermal cutting that facilitates the user and adjacent machinery. • Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. • Water dispenser kit available as an accessory • Brushed Chrome Cooking Plate, the innovative chrome plating technology adopted combines the strength of steel plates with the anti-oxidant properties of chrome plates, resulting in a slightly rough surface that improves resistance to cuts and bumps. Metal tools can be used directly on the plate without risking damage.





CODICE CR1770489 MODELLO

D92/10TSFTECS

DIAMANTE 90

SERIE

### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR1770489
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	45 Kg
VOLUME (net)	0.09
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	550 mm
PACKAGE VOLUME	0,209 m3
GROSS PACKING WEIGHT	55.8 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5 kW
IP GRADE	IPX5




## FRY TOP S Electric M40 Brushed Chrome Plate -

## **Smooth - Thermostat Top Version**



CODICE CR1770489 MODELLO D92/10TSFTECS SERIE DIAMANTE 90

#### MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

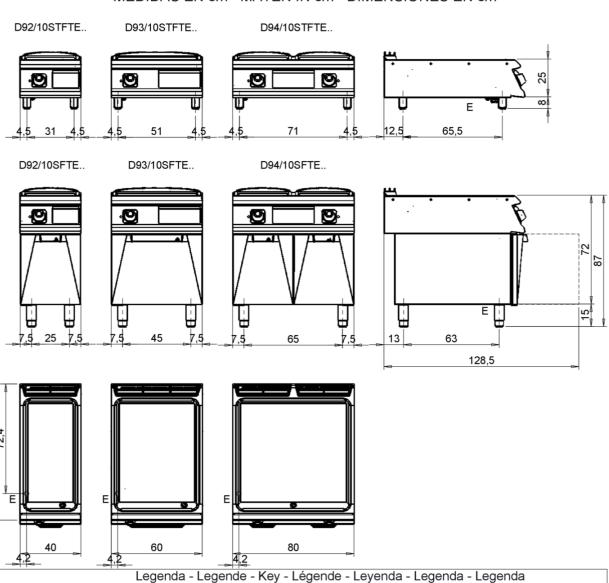

	Legenda	<ul> <li>Legende</li> </ul>	- Key - Lége	ende - Leyenda	- Legenda -	Legenda
_						

- Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
- G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz -Union de gas - Gasaansluiting - Ligação gás
- Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
- Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac -**S1** Descarga cuba - Water toevoer - Descarga da cuba
- A1 = Calda Heiss Warm Chaude Caliente Warm Morno
- Valvola di depressione Anti-depression valve Unterdruck ventil -Soupape de dépression - Válvula de dépresión - Onderdrukklep -Válvula de depressão
- A2 = Fredda Kalt Cold Froid Fria Koude Frio
- S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
- Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível





90



CODICE CR1770489 MODELLO
D92/10TSFTECS

SERIE
DIAMANTE 90



Brushed chrome plate surface designed to resist scratches and facilitate daily cleaning. complies with Regulation (EC) No. 1935/2004



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food





Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.





CODICE CR1770489 MODELLO

SERIE

D92/10TSFTECS DIAMANTE 90

### **ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658619	97CPFT4	M40 fry top cleaning drawer
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658669	9AFT4	Splash guard riser 90cm M40
CR1659229	PAFT4	SUPER FRY TOP ACCESSORY HOLDER
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1658699	D794CAFT	WATER LOADING FOR FRY TOP M40 - D70 D90 - GAS OR ELECTRIC
CR1658779	D94EKSCFT	CONTINUOUS DISCHARGE FOR FRY TOP M40 - D90 - ELECTRIC
CR1658809	D94ECSCFT	LOAD + SCAR.CONTINUOUS FOR FRY TOP M40 - D90 - ELECTRIC

