

CODICECR1770499

MODELLO
D93/10TSFTECS

SERIE
DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

- 15 mm thick cooking plate totally independent of the hob. Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. Large grease collection drawer. Uniform baking temperature over the entire plate. Optimising heat in the cooking area and increasing the comfort of operators in the kitchen. Plate not welded to the machine bed with optimisation of structural points under thermal stress Stainless steel overflow plug, supplied as an accessory, for channel flooding management Plate not welded to the machine bed with optimisation of structural points under thermal stress New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention

of moisture in cooking food • Large fat collection drawer with capacity of the entire volume of the perimeter channel • Grooved plate design ensures cleanliness right to the end of the plate • Plate not welded to the machine bed with optimisation of structural points under thermal stress • Plate not welded to the machine bed with optimisation of structural points under thermal stress • Thermal cutting that facilitates the user and adjacent machinery. • Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. • Water dispenser kit available as an accessory • Brushed Chrome Cooking Plate, the innovative chrome plating technology adopted combines the strength of steel plates with the anti-oxidant properties of chrome plates, resulting in a slightly rough surface that improves resistance to cuts and bumps. Metal tools can be used directly on the plate without risking damage.





CODICE CR1770499 MODELLO

SERIE

D93/10TSFTECS DIAMANTE 90

Technical Information

SPECIFICATION	DATA	
MATERIAL	CR1770499	
COMMERCIAL LINE	DIAMANTE	
SUPPLY	ELECTRICS	
DIM. WIDTH 600 mm		
DIM. PRODUCTIVITY	900 mm	
DIM. HEIGHT	250 mm	
NET WEIGHT	22 Kg	
VOLUME (net)	0.135	
PACKAGE LENGTH	640 mm	
PACKAGE WIDTH	890 mm	
PACKAGING HEIGHT	550 mm	
PACKAGE VOLUME	0,300 m3	
GROSS PACKING WEIGHT	29 Kg	
STANDARD POWER SUPPLY	380-415V 3N	
FREQUENCY	50-60 Hz	
ELECTRICAL POWER	7.5 kW	
IP GRADE	IPX5	



FRY TOP S Electric M60 Brushed Chrome Plate -

Smooth - Thermostat Top Version




CODICE CR1770499 MODELLO D93/10TSFTECS

DIAMANTE 90

SERIE

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

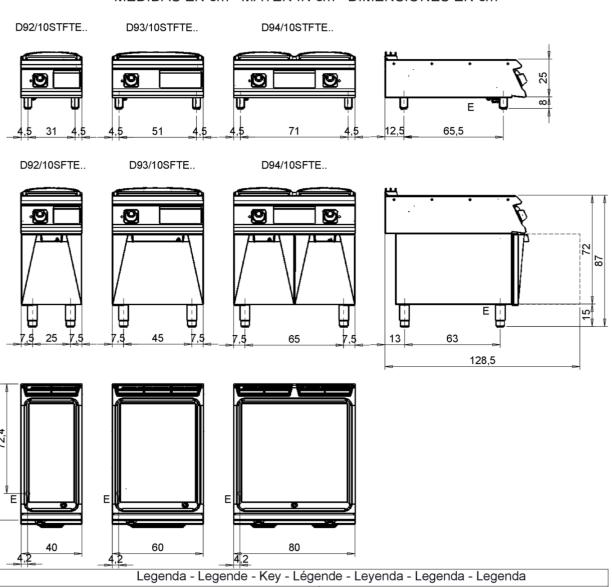

- Pressacavo entrata linea elettrica Stopfbuchse Electric cable
- stress relief Presse étoupe de câble él Pisacable Elektrische kabelwartel - Entrada cabo eléctrico
- Arrivo gas Gasanschluss Gas connection Arrivée gaz -Union de gas - Gasaansluiting - Ligação gás
- Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
- Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac -**S1** Descarga cuba - Water toevoer - Descarga da cuba
- A1 = Calda Heiss Warm Chaude Caliente Warm Morno
- Valvola di depressione Anti-depression valve Unterdruck ventil -Soupape de dépression - Válvula de dépresión - Onderdrukklep -Válvula de depressão
- A2 = Fredda Kalt Cold Froid Fria Koude Frio
- S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
- Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível





90



CODICE CR1770499 MODELLO
D93/10TSFTECS

DIAMANTE 90

SERIE



Brushed chrome plate surface designed to resist scratches and facilitate daily cleaning. complies with Regulation (EC) No. 1935/2004



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.





CODICE CR1770499 MODELLO

D93/10TSFTECS

DIAMANTE 90

SERIE

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658629	D97CPFT68	Fry top cleaning drawer M60 - M80
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658679	9AFT6	SPLASH GUARD FOR FRY TOP MODULE 600
CR1659239	PAFT6	SUPER FRY TOP ACCESSORY HOLDER M60
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1659269	AGMFT6	HOLDING GRID FOR FRY TOP
CR1658709	D7968CAFT	WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC
CR1658789	D96EKSCFT	CONTINUOUS DISCHARGE FOR FRY TOP M60 - D90 - ELECTRIC
CR1658819	D96ECSCFT	LOAD + SCAR.CONTINUOUS FOR FRY TOP M60 - D90 - ELECTRIC

