

**CR0990789** 

MODELLO D96/10KBEM SERIE
DIAMANTE 90



#### **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

- Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil.  $\blacksquare$  It guarantees high performance, exceptional firing uniformity.  $\blacksquare$  Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment  $\blacksquare$  Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.
- IRON baking tray (available for non-EU markets) with 2 mm thickness. Cooking temperature controlled by thermostat with

adjustment from 100 to 280°C. Heating via armoured incoloy heating elements. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and underknobs can be washed, without compromising functionality and safety.





CODICE CR0990789 **MODELLO**D96/10KBEM

SERIE
DIAMANTE 90

### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0990789
DEFINITION	D96/10 KBEM BRASIERA EL.M120 FE MOT.
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NETWEIGHT	174 Kg
VOLUME (net)	0.94
PACKAGE LENGTH	1260 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,480 m3
GROSS PACKING WEIGHT	202 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	13.5 kW
IP GRADE	IPX5
CERTIFIED MODEL	D96/10 KBEM





CODICE

MODELLO

SERIE


CR0990789

D96/10KBEM

DIAMANTE 90


### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

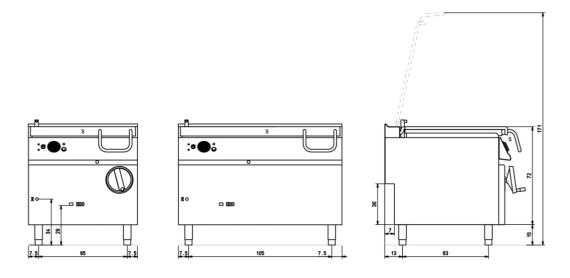







Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac - Descarga cuba - Water toevoer





5



CODICE CR0990789 **MODELLO**D96/10KBEM

SERIE
DIAMANTE 90



Self-balancing lids.



Large-radius tilting tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



