80lt GAS MOTORIZED BRATT PAN WITH IRON BOTTOM (Extra EU)



CODICE CR0990709 **modello** D94/10KBGM

SERIE DIAMANTE 90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil.
It guarantees high performance, exceptional firing uniformity.
Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment
Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

■ IRON baking tray (available for non-EU markets) with 2 mm thickness. ■ Cooking temperature controlled by thermostat with

adjustment from 100 to 280°C. ■ Heating by chrome-plated steel burner. ■ Safety valve with thermocouple, electric ignition. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



80lt GAS MOTORIZED BRATT PAN WITH IRON BOTTOM (Extra EU)



CODICE CR0990709 **MODELLO** D94/10KBGM **SERIE** DIAMANTE 90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990709
DEFINITION	D94/10 KBGM BRASIERA GAS M80 FE MOT.
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	150 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1040 mm
PACKAGE VOLUME	1,300 m3
GROSS PACKING WEIGHT	167 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0.12 kW
GAS POWER	20
GAS POWER (G25.3/25mbar)	19,00
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 KBGM



to ISO 9001

80lt GAS MOTORIZED BRATT PAN WITH IRON


BOTTOM (Extra EU)


CIS Weinnovate cooking

CODICE CR0990709 **MODELLO** D94/10KBGM **SERIE** DIAMANTE 90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

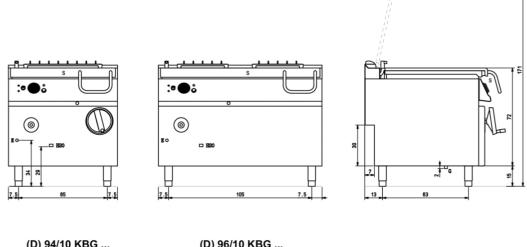

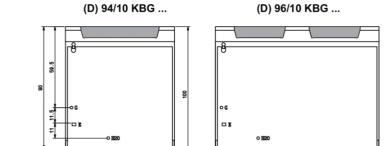

Ŧ

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226–1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac - Descarga cuba - Water toevoer

4



80lt GAS MOTORIZED BRATT PAN WITH IRON

BOTTOM (Extra EU)

CODICE CR0990709 **modello** D94/10KBGM **SERIE** DIAMANTE 90





Large-radius tilting tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



