

# 80lt. MOTORISED GAS BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990719

MODELLO  
D94/10KBGIM

SERIE  
DIAMANTE 90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

■ Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. ■ It guarantees high performance, exceptional firing uniformity. ■ Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

■ Stainless steel cooking vessel, 10 mm thick. ■ Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. ■

Heating by chrome-plated steel burner. ■ Safety valve with thermocouple, electric ignition. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Large-radius tilting tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# 80lt. MOTORISED GAS BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990719

MODELLO  
D94/10KBGIM

SERIE  
DIAMANTE 90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990719
DEFINITION	D94/10 KBGIM BRASIERA GAS M80 INOX MOT.
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	147 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	162 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0.12 kW
GAS POWER	20
GAS POWER (G25.3/25mbar)	19,00
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 KBGIM

# 80lt. MOTORISED GAS BRATT PAN WITH STAINLESS STEEL BOTTOM


CODICE  
CR0990719

MODELLO  
D94/10KBGIM

SERIE  
DIAMANTE 90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

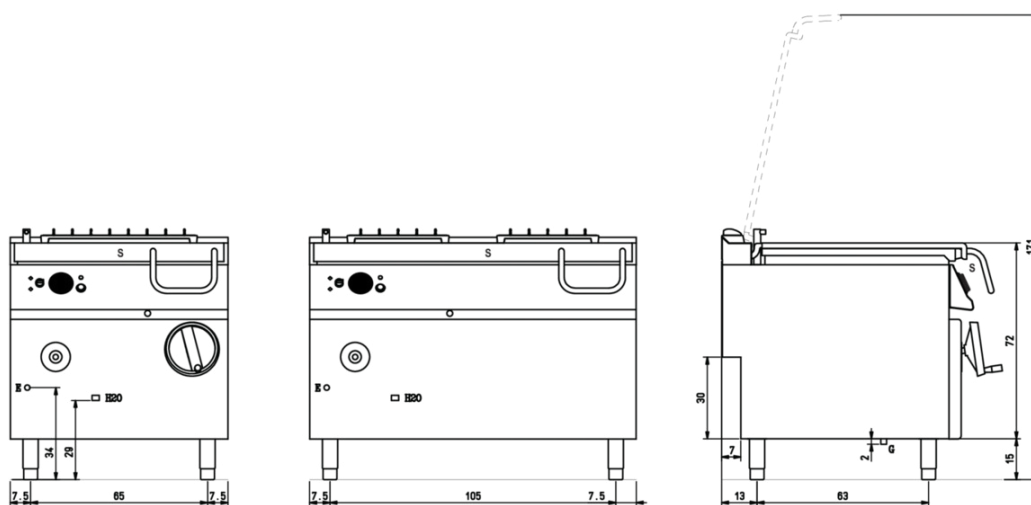

(D) 94/10 KBG ...

(D) 96/10 KBG ...



### Legenda - Legende - Key - Légende - Leyenda - Legend

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection  
Arrivée gaz - Union de gas - Gasaansluiting  
**EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico vasca - Wannenabflussrohr - Pan outlet  
Vidange du bac - Descarga cuba - Water toevoer

# 80lt. MOTORISED GAS BRATT PAN WITH STAINLESS STEEL BOTTOM

CODICE  
CR0990719

MODELLO  
D94/10KBGIM

SERIE  
DIAMANTE 90



Self-balancing lids.



Large-radius tilting tank.



Equipment certified for low voltage  
directive 2014/35/EU according to the  
international CB scheme.



Thanks to the jet-proofing certification  
(IPX5) obtained through specific tests,  
knobs and under-knobs can be washed,  
without compromising functionality  
and safety.