CIS Weinnovate cooking

**CODICE** CR0990999 MODELLO D93/10CPG

**SERIE** DIAMANTE 90



## **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

#### **TECHNICAL SPECIFICATIONS**

■ Moulded tubs with rounded corners, made of AISI 316 stainless steel for maximum corrosion resistance. ■ Water filling available by means of solenoid valve with the possibility of fast or slow loading or by means of a mechanical tap located on the control panel Stainless steel water outlet integrated in the expansion zone, and floor drain. ■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Gas version: Heating via stainless steel burner positioned outside the tank. ■ Safety gas valve with thermocouple and electric ignition. ■ Electric version: Heating by means of an AISI 304 steel armoured heating element located in the tank and rotatable by 90° for easy cleaning.

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





**CODICE** CR0990999 MODELLO D93/10CPG **SERIE** DIAMANTE 90

## **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0990999
DEFINITION	D93/10 CPG CUOCIPASTA GAS M60 1V.42LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	66 Kg
VOLUME (net)	0.47
PACKAGE LENGTH	1020 mm
PACKAGE WIDTH	440 mm
PACKAGING HEIGHT	1050 mm
PACKAGE VOLUME	0,800 m3
GROSS PACKING WEIGHT	76.4 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0.03 kW
GAS POWER	21
GAS POWER (G25.3/25mbar)	19,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
TENSION	230
IP GRADE	IPX5
CERTIFIED MODEL	D93/10 CPG
Capacity	42 litri






**CODICE** CR0990999 MODELLO D93/10CPG

**SERIE** DIAMANTE 90

#### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

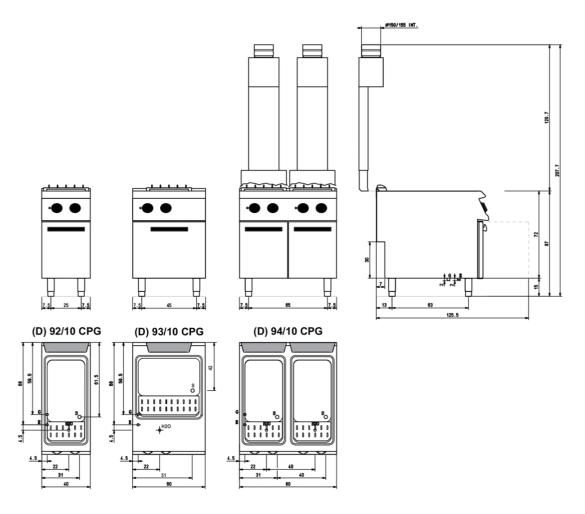

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226–1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1



**CODICE** CR0990999 MODELLO D93/10CPG **SERIE** DIAMANTE 90





Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





**CODICE** CR0990999 **MODELLO** D93/10CPG

**SERIE** DIAMANTE 90

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1356219	CCP13F60	Basket 16x28x18 cm GN1/3 FOR D93/10 CP.
CR0789950	96KIT-A(93)	Bath Basket Kit 96KIT-A (93)
CR0789960	96KIT-B(93)	Bath Basket Kit 96KIT-B (93)

