

**CODICE** CR0991019 MODELLO D92/10CPE

**SERIE** DIAMANTE 90



## **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

#### **TECHNICAL SPECIFICATIONS**

■ Moulded tubs with rounded corners, made of AISI 316 stainless steel for maximum corrosion resistance. ■ Water filling available by means of solenoid valve with the possibility of fast or slow loading or by means of a mechanical tap located on the control panel Stainless steel water outlet integrated in the expansion zone, and floor drain. ■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Gas version: Heating via stainless steel burner positioned outside the tank. ■ Safety gas valve with thermocouple and electric ignition. ■ Electric version: Heating by means of an AISI 304 steel armoured heating element located in the tank and rotatable by 90° for easy cleaning.

■ Safety pressure switch to prevent activation of heating without water in the tank. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





**CODICE** CR0991019 MODELLO D92/10CPE **SERIE** DIAMANTE 90

## **Technical Information**

SPECIFICATION	DATA	
MATERIAL	CR0991019	
DEFINITION	D92/10 CPE CUOCIPASTA EL. M40 1V.40LT	
COMMERCIAL LINE	DIAMANTE	
SUPPLY	ELECTRICS	
DIM. WIDTH 400 mm		
DIM. PRODUCTIVITY 900 mm		
DIM. HEIGHT 870 mm		
NETWEIGHT	45.5 Kg	
VOLUME (net)	0.313	
PACKAGE LENGTH	460 mm	
PACKAGE WIDTH	1020 mm	
PACKAGING HEIGHT	1150 mm	
PACKAGE VOLUME	0,540 m3	
GROSS PACKING WEIGHT	55.5 Kg	
STANDARD POWER SUPPLY	380-415V 3N	
FREQUENCY	50-60 Hz	
ELECTRICAL POWER	8.5 kW	
TENSION	400	
IP GRADE	IPX5	
CERTIFIED MODEL	D92/10 CPE	




to ISO 9001



**CODICE** CR0991019 MODELLO D92/10CPE **SERIE** DIAMANTE 90

#### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

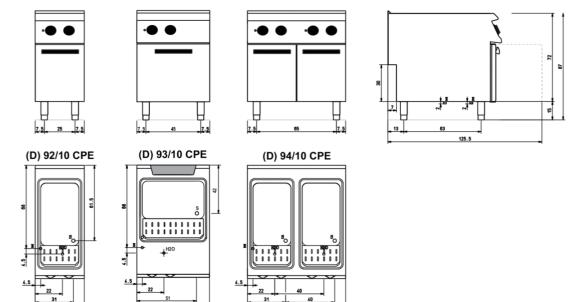

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1



4

**CODICE** CR0991019 **MODELLO** D92/10CPE **SERIE** DIAMANTE 90





Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





**CODICE** CR0991019 **SERIE** DIAMANTE 90

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0999149	GFCP40	40Lt BOTTOM TANK GRID
CR0999179	9KIT-A	40 LITRE TUB BASKET KIT
CR0999189	9KIT-B	40 LITRE TUB BASKET KIT
CR0999199	9KIT-C	40 LITRE TUB BASKET KIT
CR0999219	9KIT - E	KIT 2 GN1/2 STAINLESS STEEL BASKETS WITH SIDE HANDLES
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999169	CVCP40	40 LITRE TANK LID

