**CODICE** CR1353739 MODELLO D9215/10FRERE

**SERIE** DIAMANTE 90





### GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

#### **TECHNICAL SPECIFICATIONS**

■ AISI 18/10 stainless steel tanks with cold zone and foam expansion zone. ■ Oil drain taps. ■ Oil drip pans on request. ■ Safety thermostat (230°C) against excessive oil temperatures. ■ IPX5 water jet protection

■ Tank depth and width increased to increase capacity. ■ Moulded basin with flat top and large cold zone for easy cleaning. ■ The large cold zone allows frying residues to settle, significantly extending the

quality and life of the oil. • Heating element completely removable from the tank for faster and more thorough cleaning. • Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. • Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



**CODICE** CR1353739

**MODELLO** D9215/10FRERE **SERIE** DIAMANTE 90



### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR1353739
DEFINITION	D9215/10 FRERE FRIG.EL.R/RIB.M40 1V 15LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	930 mm
DIM. HEIGHT	950 mm
NETWEIGHT	45 Kg
VOLUME (net)	0.353
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,522 m3
GROSS PACKING WEIGHT	55 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50/60 Hz
ELECTRICAL POWER	13 kW
IP GRADE	IPX5
CERTIFIED MODEL	D9215/10FRERE
Capacity	15 litri



to ISO 9001




**CODICE** CR1353739

60

MODELLO D9215/10FRERE

**SERIE** DIAMANTE 90

### MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

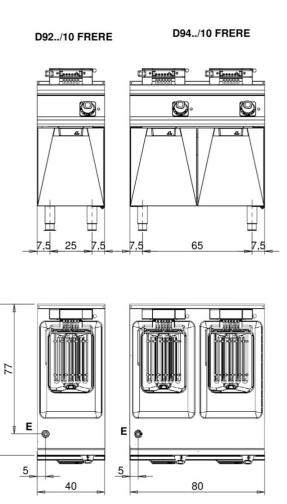

		93
	4	
136		EB
	30 87	
V	<u>S</u>	
		13 63
		125,5 (M40-M80)

		- Leyenda - Legenda - Legenda
Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção
Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	100000	alimentação água Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão		
interntiaire. Africanautante annimte Deserve de érre es	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível
Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		
	stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto Scarico - Abflussrohr - Drain - Tuyau d'évacuation -	stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctricoH20Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga águaH20Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cubaA1 = A2 =Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépression - Onderdrukklep - Válvula de depressão Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água na marmita com Sistema de aquecimento indirectoL



ificato ISO 9001

**CODICE** CR1353739 MODELLO D9215/10FRERE **SERIE** DIAMANTE 90





Tank depth and width increased to increase capacity.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Moulded basin with flat top and large cold zone for easy cleaning.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Heating element completely removable from the tank for faster and more thorough cleaning.





**CODICE** CR1353739 **MODELLO** D9215/10FRERE

**SERIE** DIAMANTE 90

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1353929	D9BRO	Oil pan 10-12 -15-17-22-23 litres
CR1356909	CA40/10	Chimney extension for mod. 40 cm h=22 cm
BN0221100048	CA60/10	Chimney extension for mod. 60 cm h=22 cm

