

CODICE CR1353749 MODELLO
D9415/10FRERE

SERIE
DIAMANTE 90



## **GENERAL CHARACTERISTICS**

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

# **TECHNICAL SPECIFICATIONS**

- AISI 18/10 stainless steel tanks with cold zone and foam expansion zone. Oil drain taps. Oil drip pans on request. Safety thermostat (230°C) against excessive oil temperatures. IPX5 water jet protection
- Tank depth and width increased to increase capacity. Moulded basin with flat top and large cold zone for easy cleaning. The large cold zone allows frying residues to settle, significantly extending the

quality and life of the oil. • Heating element completely removable from the tank for faster and more thorough cleaning. • Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. • Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.







**CODICE** CR1353749

MODELLO D9415/10FRERE SERIE
DIAMANTE 90

# **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR1353749
DEFINITION	D9415/10 FRERE FRIG.EL.R/RIB.M80 2V 15LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	850 mm
NETWEIGHT	81 Kg
VOLUME (net)	0.612
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	96 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50/60 Hz
ELECTRICAL POWER	26 kW
IP GRADE	IPX5
CERTIFIED MODEL	D9415/10FRERE
Capacity	15 litri






CODICE CR1353749 MODELLO

D9415/10FRERE

DIAMANTE 90

SERIE

# MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

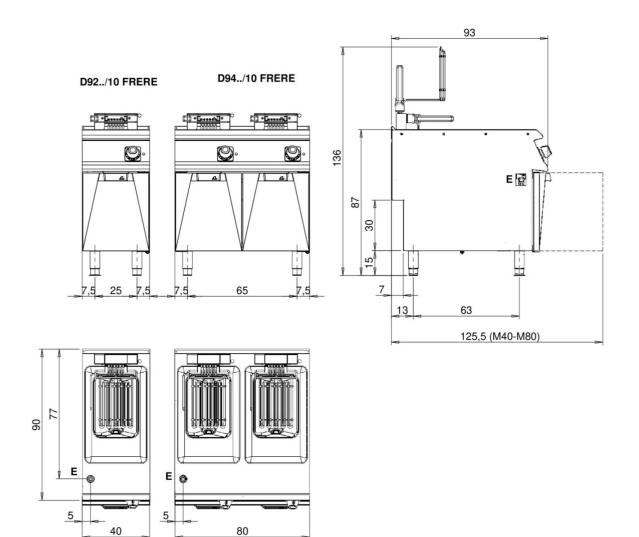

	Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda					
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás			
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água			
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	100000000000000000000000000000000000000	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio			
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão					
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto		Rubinetto di livello - Level tap - Wasserhahn - Robinet de			
			niveau - Grifo de nivel - Niveaukraan - Torneira de nível			
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation -					
	Tubo de drenaje - Aftapbuis - Tubulação de dreno					







**CODICE** CR1353749

MODELLO
D9415/10FRERE

SERIE
DIAMANTE 90



Tank depth and width increased to increase capacity.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Moulded basin with flat top and large cold zone for easy cleaning.



Heating element completely removable from the tank to allow faster and more complete cleaning. In 10and 15-liter versions



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.







CODICE CR1353749 **MODELLO**D9415/10FRERE

SERIE

DIAMANTE 90

# **ACCESSORIES**

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1353929	D9BRO	Oil pan 10-12 -15-17-22-23 litres
CR1356909	CA40/10	Chimney extension for mod. 40 cm h=22 cm
BN0221100048	CA60/10	Chimney extension for mod. 60 cm h=22 cm

