

## ELECTRIC CHIP SCUTTLE

CODICE  
CR0990629

MODELLO  
D92/10SPE

SERIE  
DIAMANTE 90



### GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200 Wide range of accessories.

### TECHNICAL SPECIFICATIONS

■ Heating by means of an upper infrared heating element and a lower heating element under the tub. ■ Thermostatic temperature control (30-90°C)

■ Hot container also with upper infrared heating element ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC CHIP SCUTTLE

CODICE  
CR0990629

MODELLO  
D92/10SPE

SERIE  
DIAMANTE 90

## Technical Information

| SPECIFICATION         | DATA                                   |
|-----------------------|----------------------------------------|
| MATERIAL              | CR0990629                              |
| DEFINITION            | D92/10 SPE SCALDAPATATE EL.M40 VANO G. |
| COMMERCIAL LINE       | DIAMANTE                               |
| SUPPLY                | ELECTRICS                              |
| DIM. WIDTH            | 400 mm                                 |
| DIM. PRODUCTIVITY     | 900 mm                                 |
| DIM. HEIGHT           | 870 mm                                 |
| NET WEIGHT            | 35 Kg                                  |
| VOLUME (net)          | 0.313                                  |
| PACKAGE LENGTH        | 440 mm                                 |
| PACKAGE WIDTH         | 1020 mm                                |
| PACKAGING HEIGHT      | 1160 mm                                |
| PACKAGE VOLUME        | 0,522 m3                               |
| GROSS PACKING WEIGHT  | 45 Kg                                  |
| STANDARD POWER SUPPLY | 220-240V 1N                            |
| FREQUENCY             | 50-60 Hz                               |
| ELECTRICAL POWER      | 2 kW                                   |
| IP GRADE              | IPX4                                   |
| CERTIFIED MODEL       | D92/10 SPE                             |

# ELECTRIC CHIP SCUTTLE

CODICE  
CR0990629



MODELLO  
D92/10SPE

SERIE  
DIAMANTE 90




## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

(D) 92/10 TSPE

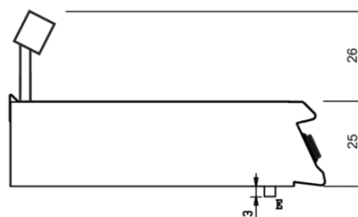

(D) 92/10 SPE

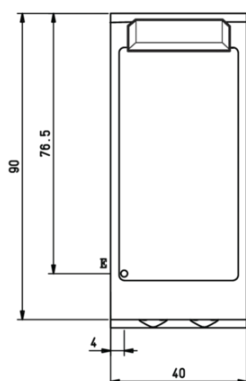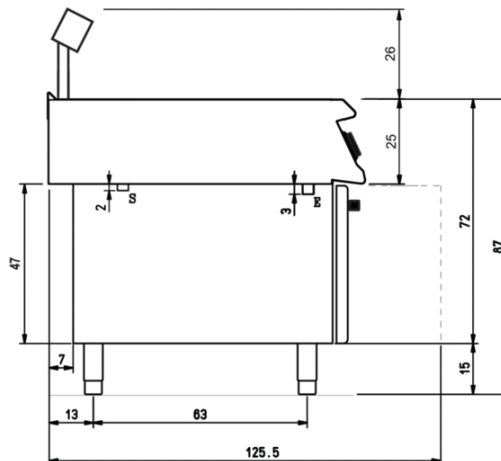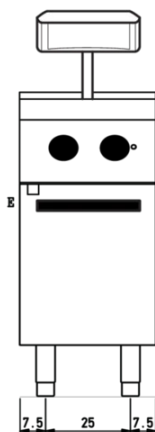

### Legenda - Legende - Key - Légende - Leyenda - Legenda


- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

## ELECTRIC CHIP SCUTTLE

CODICE  
CR0990629

MODELLO  
D92/10SPE

SERIE  
DIAMANTE 90



Hot container also with upper infrared heating element



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.