CODICE CR0993589 MODELLO D74/10CGE **SERIE** DIAMANTE 70





GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

All kitchens are equipped with 3.5 and 5.6 kW burners with stabilized flame, in cast iron, nickel-plated with a perfect protection of upper burners thermocouples obtained with a special "dome" shaped protection.
Thermocouple safety valves with pilot flame.
Acidresistant black enameled cast iron grills.

■ 90° venturi that prevents the nozzle from clogging and accumulating dirt. ■ Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans ■ Removable AISI 304

stainless steel bowl for maximum hygiene. ■ For gas ovens, radiant plate

in cast iron for even heat distribution

even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges. Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety. Installed burners: 2 x 3.5 kW + 2 x 5.6 kW.





CODICE CR0993589 MODELLO D74/10CGE **SERIE** DIAMANTE 70

Technical Information


SPECIFICATION	DATA
MATERIAL	CR0993589
DEFINITION	D74/10 CGE 4 FUOCHI GAS FORNO EL.
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NETWEIGHT	121.4 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	131.4 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	6 kW
GAS POWER	20.3
GAS POWER (G25.3/25mbar)	18,60
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	QUATTRO FUOCHI
TENSION	400
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 CGE





CODICE CR0993589 MODELLO D74/10CGE **SERIE** DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

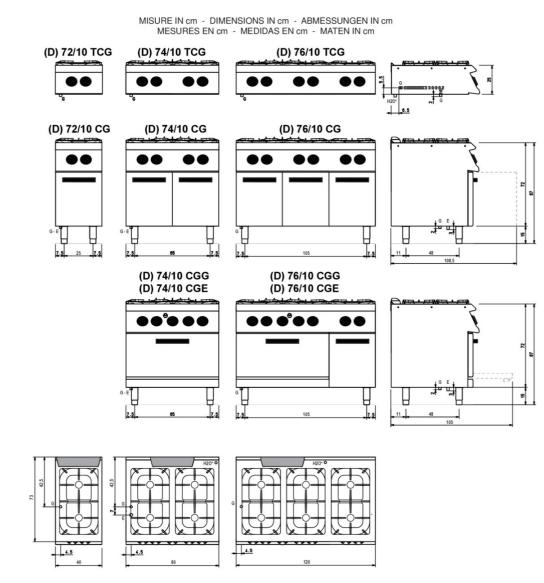

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él Pisacable - Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226–1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- H2O* Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4




CODICE CR0993589 **MODELLO** D74/10CGE **SERIE** DIAMANTE 70 CIS Weinnovate cooking



90° venturi that prevents the nozzle from clogging and accumulating dirt.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Removable AISI 304 stainless steel bowl for maximum hygiene.



For gas ovens, radiant plate in cast iron for even heat distribution even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges.





CODICE CR0993589 **MODELLO** D74/10CGE **SERIE** DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
SUPBRUC	SUPBRUC	Supplement for burner 10 kw 10 (Kcal 8598.45)
MA97365000	GGN1/1	CHROME GRILLE GN1/1
MA97375000	GGN2/1	CHROME GRILLE GN2/1
MA97377000	BF9M-X	Chrome-plated steel grill for oven 93x62 cm MAXI
MA97376900	TGN2/1	AISI 304 stainless steel tray for oven 53x65x1 cm GN 2/1
MA97378000	BF9M-T	AISI 304 stainless steel baking tray for oven 93x62x1,5 cm MAXI
CR135819	CR135819	Smooth cast iron radiant plate 55x31 cm
CR1353829	CR1353829	RIBBED RADIANT PLATE

