

CR0993609

MODELLO D76/10CGE SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

TECHNICAL SPECIFICATIONS

- All kitchens are equipped with 3.5 and 5.6 kW burners with stabilized flame, in cast iron, nickel-plated with a perfect protection of upper burners thermocouples obtained with a special "dome" shaped protection. Thermocouple safety valves with pilot flame. Acidresistant black enameled cast iron grills.
- 90° venturi that prevents the nozzle from clogging and accumulating dirt. Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans Removable AISI 304

stainless steel bowl for maximum hygiene.

For gas ovens, radiant plate

in cast iron for even heat distribution

even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges. **E** Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. **Thanks** to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety. **I** Installed Burners: 3 x 3.5 kW + 3 x 5.6 kW.







CODICE CR0993609 **MODELLO**D76/10CGE

SERIE
DIAMANTE 70

Technical Information

| SPECIFICATION | DATA | |
|--------------------------|--------------------------------------|--|
| MATERIAL | CR0993609 | |
| DEFINITION | D76/10 CGE 6 FUOCHI FORNO EL.+ARM.N. | |
| COMMERCIAL LINE | DIAMANTE | |
| SUPPLY | MIXED | |
| DIM. WIDTH | 1200 mm | |
| DIM. PRODUCTIVITY | 730 mm | |
| DIM. HEIGHT | 870 mm | |
| NETWEIGHT | 157.6 Kg | |
| VOLUME (net) | 0.762 | |
| PACKAGE LENGTH | 1260 mm | |
| PACKAGE WIDTH | 850 mm | |
| PACKAGING HEIGHT | 1150 mm | |
| PACKAGE VOLUME | 1,232 m3 | |
| GROSS PACKING WEIGHT | 178 Kg | |
| STANDARD POWER SUPPLY | 380-415V 3N | |
| FREQUENCY | 50-60 Hz | |
| ELECTRICAL POWER | 6 kW | |
| GAS POWER | 27.3 | |
| GAS POWER (G25.3/25mbar) | 24,60 | |
| GAS/REFRIGERANT TYPE | GPL 28-30/37 mbar | |
| N. FIRES/PLATES | QUATTRO FUOCHI | |
| TENSION | 400 | |
| IP GRADE | IPX4 | |
| CERTIFIED MODEL | D76/10 CGE | |
| | | |






CR0993609

MODELLOD76/10CGE

SERIE DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

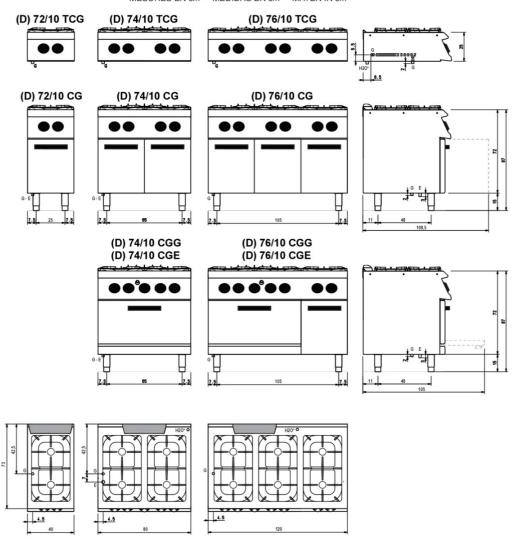

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él Pisacable - Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226–1 R 1/2; EN ISO 228-1 G 1/2 (DK)

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4







CODICE CR0993609 **MODELLO**D76/10CGE

DIAMANTE 70


SERIE



90° venturi that prevents the nozzle from clogging and accumulating dirt.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Removable AISI 304 stainless steel bowl for maximum hygiene.



For gas ovens, radiant plate in cast iron for even heat distribution even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges.







CODICE MODELLO
CR0993609 D76/10CGE

SERIE

DIAMANTE 70

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|-----------|---|
| SUPBRUC | SUPBRUC | Supplement for burner 10 kw 10 (Kcal 8598.45) |
| MA97365000 | GGN1/1 | CHROME GRILLE GN1/1 |
| MA97375000 | GGN2/1 | CHROME GRILLE GN2/1 |
| MA97377000 | BF9M-X | Chrome-plated steel grill for oven 93x62 cm MAXI |
| MA97376900 | TGN2/1 | AISI 304 stainless steel tray for oven 53x65x1 cm GN 2/1 |
| MA97378000 | BF9M-T | AISI 304 stainless steel baking tray for oven 93x62x1,5 cm MAXI |
| CR135819 | CR135819 | Smooth cast iron radiant plate 55x31 cm |
| CR1353829 | CR1353829 | RIBBED RADIANT PLATE |

