

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

CODICE
CR0991749

MODELLO
D73/10CGW14

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Table tops with 20/10 thickness with 55x52 cm or 95x52 cm storage space. ■ Right rear exhaust 22 mm in diameter, prepared for ground connection. ■ In the compartment area, full-width tray for collecting overflow liquids. ■ Fireplace for heat venting. ■ Stainless steel outer coatings and feet. Height of the work surface adjustable from 840 to 900mm.

■ Enamelled cast iron ring burner, available in 10 or 14 kW, removable for easier cleaning. ■ Table top with standardised tank and liquid drainage in the rear right-hand corner. ■ Tray for collecting overflow liquids. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

CODICE
CR0991749

MODELLO
D73/10CGW14

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991749
DEFINITION	D73/10CGW14 1 FUOCO WOK 14KW VANO GIORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	66 Kg
VOLUME (net)	0.381
PACKAGE LENGTH	660 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,645 m3
GROSS PACKING WEIGHT	76 Kg
GAS POWER	14
GAS POWER (G25.3/25mbar)	13,30
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	DUE FUOCHI
CERTIFIED MODEL	D73/10 CGW

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT


CODICE
CR0991749

MODELLO
D73/10CGW14

SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

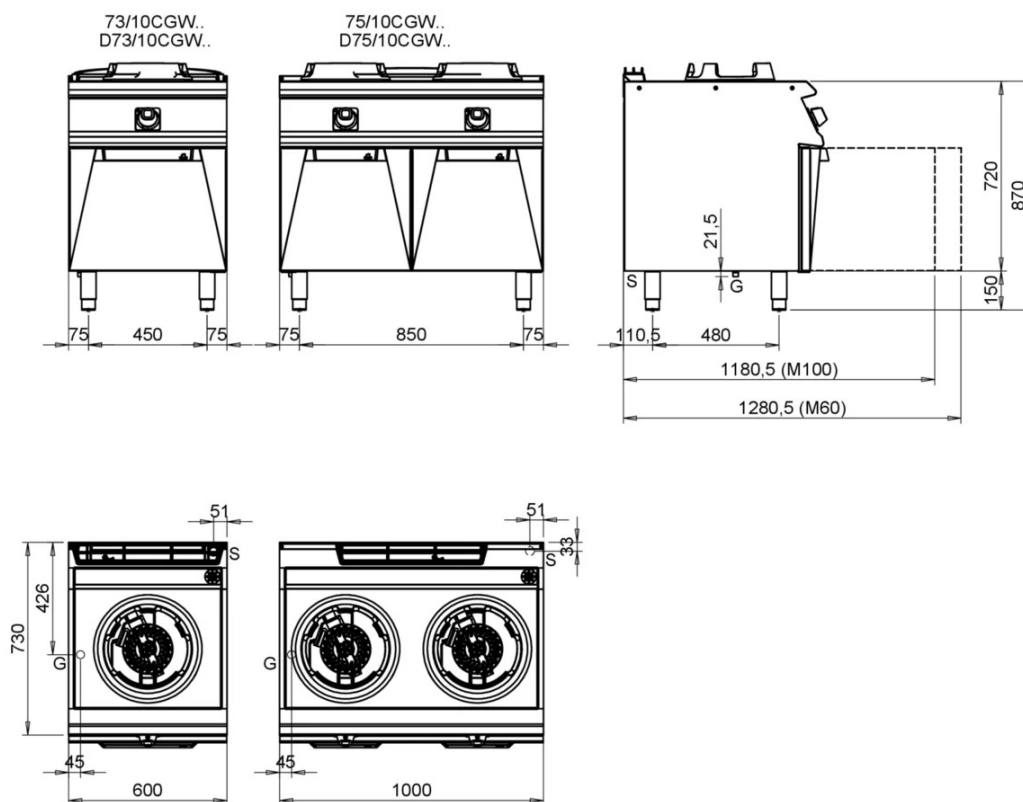

Legenda - Legende - Key - Légende - Leyenda - Legenda

- G** Attacco arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting **EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico acqua - Wasserablauf - Water drain - Evacuation eau - Descarga de agua - Afvoer water **EN 10226-1 R 1**

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

CODICE
CR0991749

MODELLO
D73/10CGW14

SERIE
DIAMANTE 70



10 kW or 14 kW enameled cast-iron burners removable for easy cleaning.



Table top with standardised tank and liquid drainage in the rear right-hand corner.



Tray for collecting overflow liquids.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.