WOK 2 BURNER GAS 14KW ON OPEN COMPARTMENT

CODICE CR0991769 MODELLO D75/10CGW28 **SERIE** DIAMANTE 70





GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Table tops with 20/10 thickness with 55x52 cm or 95x52 cm storage space. ■ Right rear exhaust 22 mm in diameter, prepared for ground connection. ■ In the compartment area, full-width tray for collecting overflow liquids. ■ Fireplace for heat venting. ■ Stainless steel outer coatings and feet.

Height of the work surface adjustable from 840 to 900mm.

■ Enamelled cast iron ring burner, available in 10 or 14 kW, removable for easier cleaning. ■ Table top with standardised tank and liquid drainage in the rear right-hand corner. ■ Tray for collecting overflow liquids. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0991769 MODELLO D75/10CGW28 **SERIE** DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991769
DEFINITION	D75/10CGW28 2 FUOC. WOK 28KW VANO GIORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	1000 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NETWEIGHT	125 Kg
VOLUME (net)	0.635
PACKAGE LENGTH	960 mm
PACKAGE WIDTH	1080 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,192 m3
GROSS PACKING WEIGHT	140 Kg
GAS POWER	28
GAS POWER (G25.3/25mbar)	26,60
CERTIFIED MODEL	D75/10 CGW




WOK 2 BURNER GAS 14KW ON OPEN


COMPARTMENT

CODICE CR0991769 **MODELLO** D75/10CGW28 **SERIE** DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

> MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

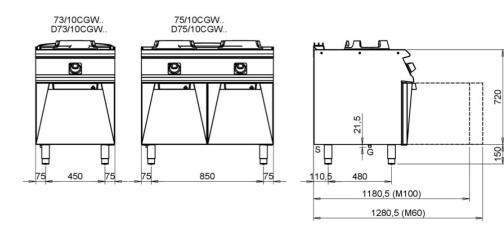



Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschuluss Gas connection Arrivée gaz Union de gas - Gasaansluiting EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Scarico acqua Wasserablauf Water drain Evacuation eau Descarga de agua -Afvoer water EN 10226-1 R 1



870



WOK 2 BURNER GAS 14KW ON OPEN COMPARTMENT

CODICE CR0991769 MODELLO D75/10CGW28 **SERIE** DIAMANTE 70





10 kW or 14 kW enameled cast-iron burners removable for easy cleaning.



Table top with standardised tank and liquid drainage in the rear right-hand corner.



Tray for collecting overflow liquids.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Olis Ali Group S.r.l. Via Del Boscon, 424 - 32100 Belluno - Italy Web: olis.it - Mail: info@olis.it