

GAS SOLID TOP ON OPEN BASE

CODICE
CR0993649

MODELLO
D74/10CTG

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Cast iron centre plate and ring. ■ Aisi 304 steel burner controlled by safety valve and thermocouple. ■ Pilot flame, thermocouple, piezoelectric ignition and valved faucet ensure maximum safety.

■ Thick top plate with removable centre ring. ■ A single high-efficiency central burner that results in differentiated heat zones on

the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

GAS SOLID TOP ON OPEN BASE

CODICE
CR0993649

MODELLO
D74/10CTG

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0993649
DEFINITION	D74/10 CTG TUTTAPIASTRA G.VANO G
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	107 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	120 Kg
GAS POWER	12
GAS POWER (G25.3/25mbar)	11,50
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	QUATTRO FUOCHI
CERTIFIED MODEL	D74/10 CTG


CODICE
CR0993649

MODELLO
D74/10CTG

SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

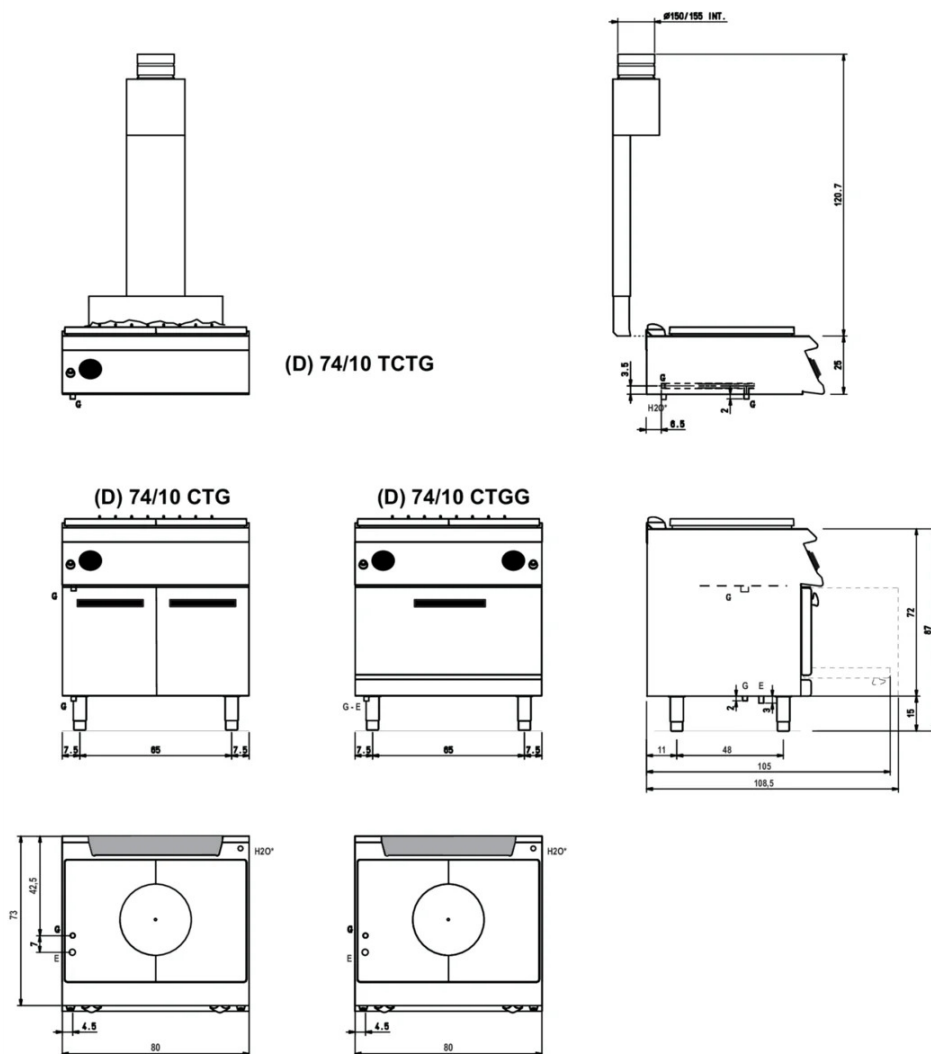

Legenda - Legende - Key - Légende - Leyenda - Legend

- E** Pressacavo entrata linea elettrica - Stopfbuchse
Electric cable stress relief - Presse étoupe de câble él
Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- H2O*** Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

GAS SOLID TOP ON OPEN BASE

CODICE
CR0993649

MODELLO
D74/10CTG

SERIE
DIAMANTE 70



Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.