

## GAS SOLID TOP ON GAS OVEN

CODICE  
CR0993669

MODELLO  
D74/10CTGG

SERIE  
DIAMANTE 70



### GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

### TECHNICAL SPECIFICATIONS

■ Cast iron centre plate and ring. ■ Aisi 304 steel burner controlled by safety valve and thermocouple. ■ Pilot flame, thermocouple, piezoelectric ignition and valved faucet ensure maximum safety.

■ Thick top plate with removable centre ring. ■ A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones. ■ For gas ovens,

radiant plate

in cast iron for even heat distribution

even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

## GAS SOLID TOP ON GAS OVEN

CODICE  
CR0993669

MODELLO  
D74/10CTGG

SERIE  
DIAMANTE 70


### Technical Information

SPECIFICATION	DATA
MATERIAL	CR0993669
DEFINITION	D74/10 CTGG TUTTAPIASTRA G. FORNO GAS
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	147 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	157.6 Kg
GAS POWER	20
GAS POWER (G25.3/25mbar)	19,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
N. FIRES/PLATES	QUATTRO FUOCHI
CERTIFIED MODEL	D74/10 CTGG

CODICE	MODELLO	SERIE
CR0993669	D74/10CTGG	DIAMANTE 70

**SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR**

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

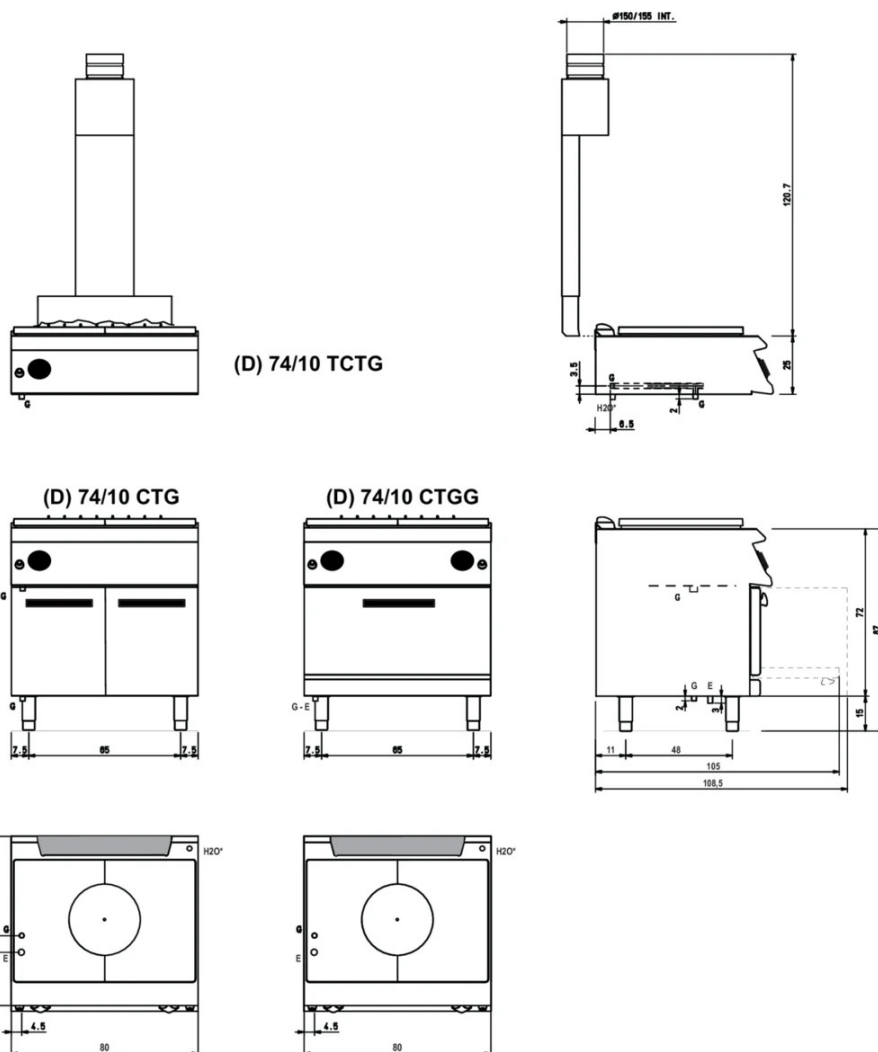

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse  
Electric cable stress relief - Presse étoupe de câble él  
Pisacable - Elektrische kabelwarterl
- G** Attacco arrivo gas - Gasanschluss - Gas connection  
Arrivée gaz - Union de gas - Gasaansluiting  
**EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- H2O\*** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**

## GAS SOLID TOP ON GAS OVEN

CODICE  
CR0993669

MODELLO  
D74/10CTGG

SERIE  
DIAMANTE 70



Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



For gas ovens, radiant plate in cast iron for even heat distribution even heat distribution, stainless steel for electric ovens. Insulated stainless steel door and inner door mounted on high-strength hinges.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## GAS SOLID TOP ON GAS OVEN

**CODICE**  
CR0993669

**MODELLO**  
D74/10CTGG

**SERIE**  
DIAMANTE 70

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97365000	GGN1/1	CHROME GRILLE GN1/1
MA97375000	GGN2/1	CHROME GRILLE GN2/1
MA97377000	BF9M-X	Chrome-plated steel grill for oven 93x62 cm MAXI
MA97378000	BF9M-T	AISI 304 stainless steel baking tray for oven 93x62x1,5 cm MAXI
MA97376900	TGN2/1	AISI 304 stainless steel tray for oven 53x65x1 cm GN 2/1