

CODICE CR0993719 MODELLO D76/10TCEPT **SERIE** DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

Contoured dashboards with controls angled toward the operator.

■ The range offers cookers with 220 mm round plates and 2.6 kW of power or 220x220 square plates and 2.6 kW fixed watertight on the worktop. ■ The temperature is adjusted by means of a 7-position

selector switch, and a warning light indicating the activation of the heating is located on the dashboard. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0993719 MODELLO D76/10TCEPT **SERIE** DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0993719
DEFINITION	D76/10 TCEPT 6 PIASTRE TONDE TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	1 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	250 mm
NETWEIGHT	82 Kg
VOLUME (net)	0.219
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	440 mm
PACKAGING HEIGHT	540 mm
PACKAGE VOLUME	0,600 m3
GROSS PACKING WEIGHT	94 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	15.6 kW
IP GRADE	IPX5
CERTIFIED MODEL	D76/10 TCEPT






CODICE CR0993719

MODELLO D76/10TCEPT **SERIE** DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

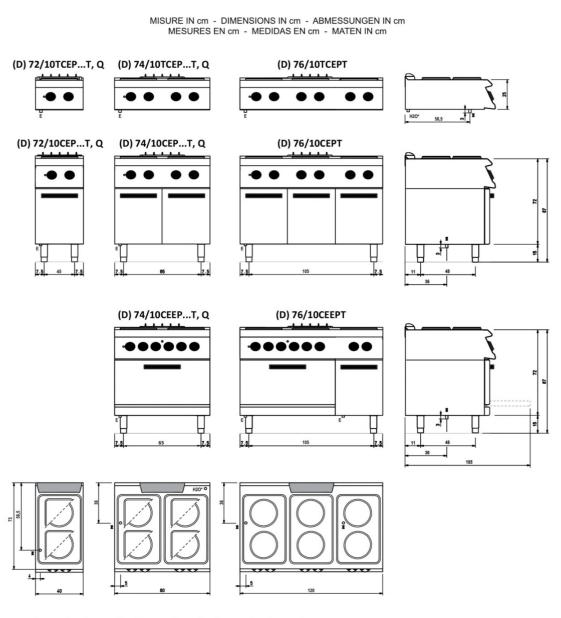

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él Pisacable - Elektrische kabelwartel
- H2O* Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4



CODICE CR0993719 MODELLO D76/10TCEPT **SERIE** DIAMANTE 70





The range offers cookers with 220 mm round plates and 2.6 kW of power or 220x220 square plates and 2.6 kW fixed watertight on the worktop.



The temperature is adjusted by means of a 7-position selector switch, and a warning light indicating the activation of the heating is located on the dashboard.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

