

CODICE CR0993759 **MODELLO**D74/10CEPT

DIAMANTE 70

SERIE



#### **GENERAL CHARACTERISTICS**

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

### **TECHNICAL SPECIFICATIONS**

- Contoured dashboards with controls angled toward the operator. ■ Stainless steel outer shells and feet.
- The range offers cookers with 220 mm round plates and 2.6 kW of power or 220x220 square plates and 2.6 kW fixed watertight on the worktop. The temperature is adjusted by means of a 7-position

selector switch, and a warning light indicating the activation of the heating is located on the dashboard. ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0993759 **MODELLO**D74/10CEPT

**SERIE**DIAMANTE 70

### **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0993759
DEFINITION	D74/10 CEPT 4 PIASTRE TONDE VANO G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NETWEIGHT	52 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	65 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	10.4 kW
N. FIRES/PLATES	QUATTRO FUOCHI
TENSION	400
IP GRADE	IPX5
CERTIFIED MODEL	D74/10 CEPT






CODICE CR0993759 **MODELLO**D74/10CEPT

SERIE
DIAMANTE 70

### SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

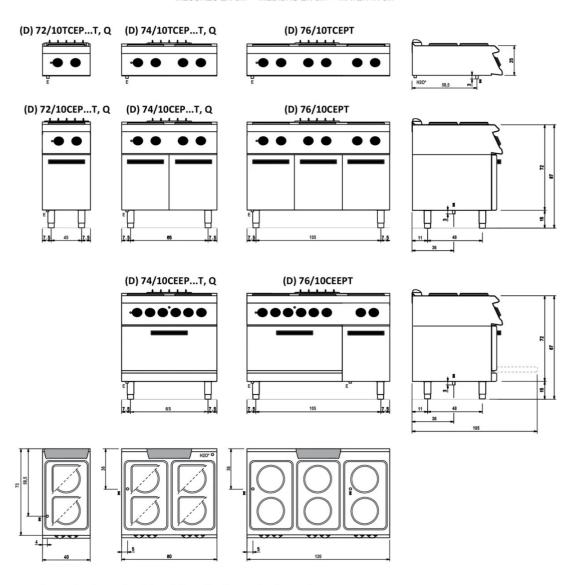

Legenda - Legende - Key - Légende - Leyenda - Legenda

Pressacavo entrata linea elettrica - Stopfbuchse Electric cable stress relief - Presse étoupe de câble él Pisacable - Elektrische kabelwartel

H2O\* Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4





3



CODICE CR0993759 **MODELLO**D74/10CEPT

DIAMANTE 70

SERIE



The range offers cookers with 220 mm round plates and 2.6 kW of power or 220x220 square plates and 2.6 kW fixed watertight on the worktop.



The temperature is adjusted by means of a 7-position selector switch, and a warning light indicating the activation of the heating is located on the dashboard.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



