

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990269

MODELLO
D74/10VTCE

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Cooking zones marked with circular silk-screen printing 23 cm in diameter. ■ 2.5 kW single zone power. ■ The temperature is adjusted by energy regulator, which allows the width of the heating zone to be selected according to the size of the bottom of the pot.

■ Unbreakable flush-mounted glass for easy handling of pans. ■ A temperature regulator sets the temperature and this permits to select two sizes of the heating zone according to the size of the pot bottom. ■ Equipment certified for low voltage directive 2014/35/EU

according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety. ■ Plates with safety thermostat that automatically activates in case of no-load or over-temperature use. ■ Hermetically sealed 6 mm thick glass-ceramic cooktop with four independent cooking zones. Each zone includes a circular radiant element with a diameter of 230 mm and an output of 2.5 kW.

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990269

MODELLO
D74/10VTCE

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990269
DEFINITION	D74/10 VTCE VETROCERAMICA 4Z. FORNO
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	95.4 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	105.4 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16 kW
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 VTCE

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN


CODICE
CR0990269

MODELLO
D74/10VTCE

SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

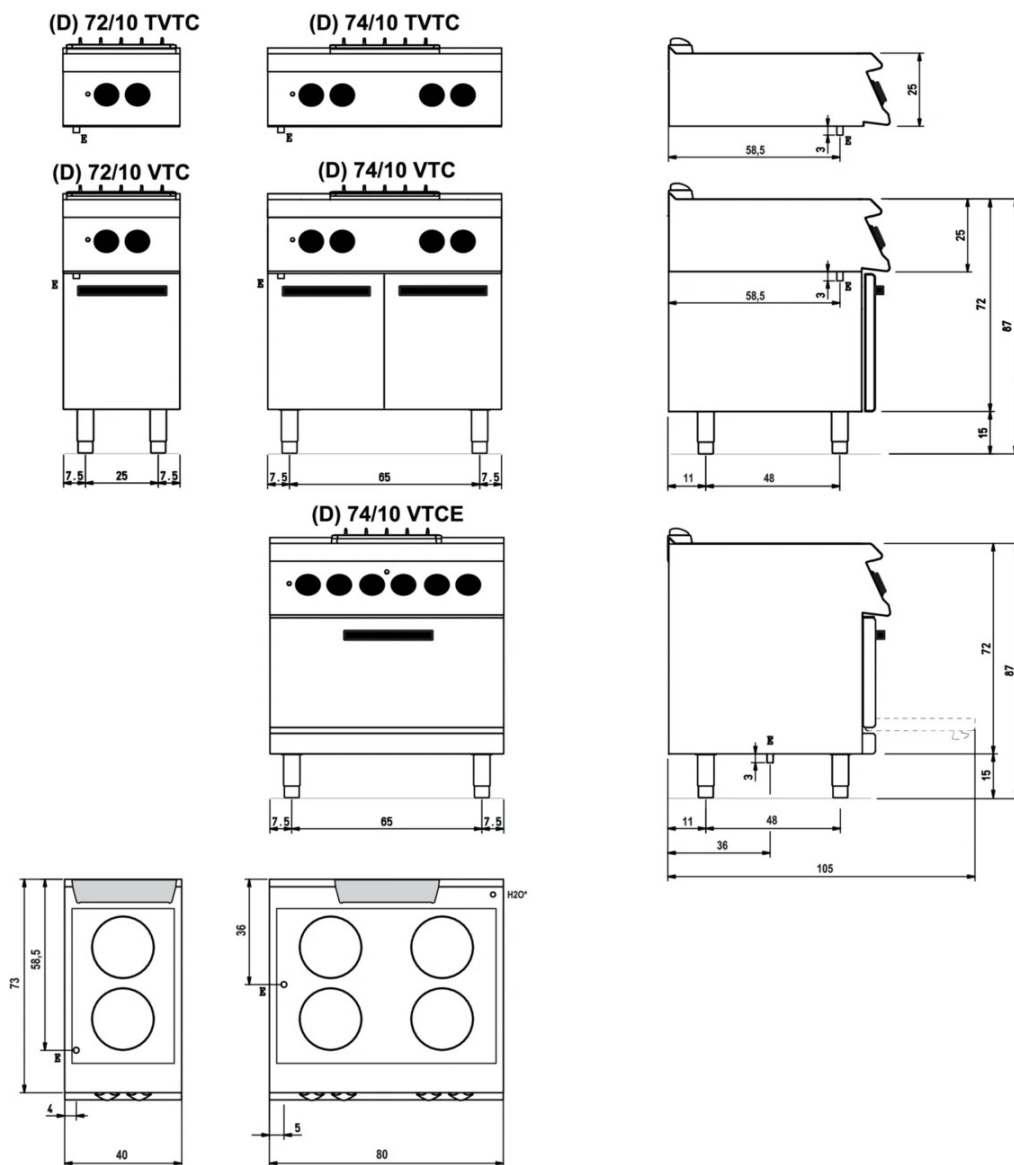

Legenda - Legende - Key - Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 1/2

4-ZONE ELECTRIC GLASS-CERAMIC COOKER ON ELECTRIC OVEN

CODICE
CR0990269

MODELLO
D74/10VTCE

SERIE
DIAMANTE 70



Unbreakable flush-mounted glass for
easy handling of pans.



A temperature regulator sets the
temperature and this permits to select
two sizes of the heating zone
according to the size of the pot
bottom.



Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.