

## INDUCTION - 20kw - On cabinet

CODICE  
CR1358229

MODELLO  
D74/10GCII

SERIE  
DIAMANTE 70



### GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

### TECHNICAL SPECIFICATIONS

■ Unbreakable glass-ceramic top. ■ Serigraphs identifying cooking zones. ■ Safety sensor to prevent overheating. ■ Power adjustable to 12 levels ■ Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

■ Ensures the correct positioning and suitability of the pot ■ Power adjustable to 12 levels ■ Professional components tested to withstand intensive use over time ■ Safety sensor to prevent overheating. ■ Cooking zones with 5KW power ■ Mechanically controlled induction ready for IOT connection to Cloud ■ Serigraphs identifying cooking zones.

## INDUCTION - 20kw - On cabinet

CODICE  
CR1358229

MODELLO  
D74/10GCII

SERIE  
DIAMANTE 70

### Technical Information

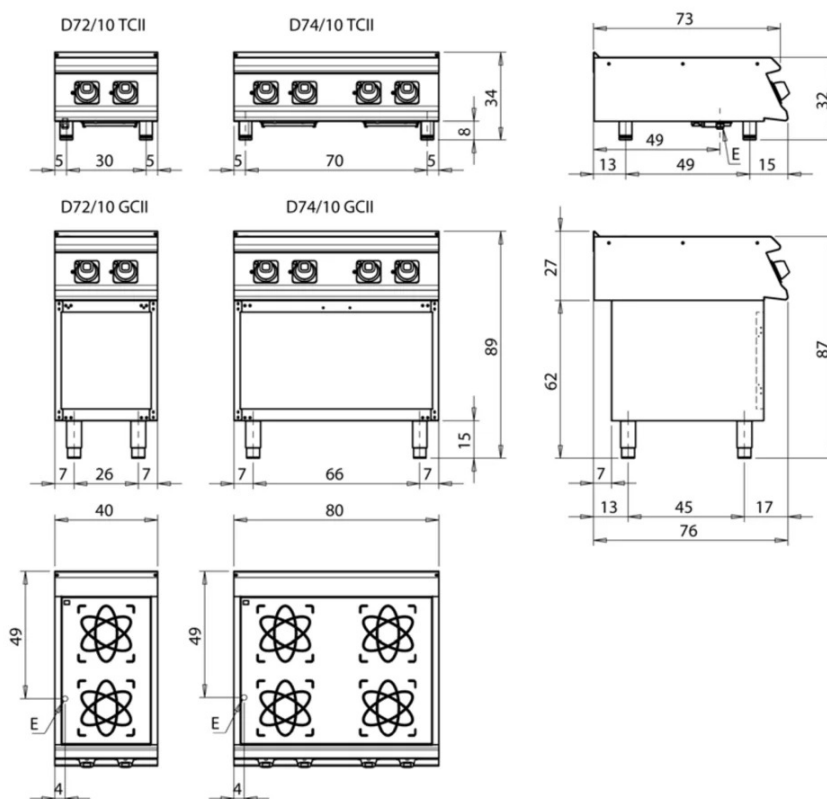
| SPECIFICATION         | DATA                          |
|-----------------------|-------------------------------|
| MATERIAL              | CR1358229                     |
| DEFINITION            | D74/10 GCII INDUZIONE M80 A/G |
| COMMERCIAL LINE       | DIAMANTE                      |
| SUPPLY                | ELECTRICS                     |
| DIM. WIDTH            | 800 mm                        |
| DIM. PRODUCTIVITY     | 730 mm                        |
| DIM. HEIGHT           | 870 mm                        |
| NET WEIGHT            | 74 Kg                         |
| VOLUME (net)          | 0.508                         |
| PACKAGE LENGTH        | 840 mm                        |
| PACKAGE WIDTH         | 850 mm                        |
| PACKAGING HEIGHT      | 1170 mm                       |
| PACKAGE VOLUME        | 0,836 m3                      |
| GROSS PACKING WEIGHT  | 84.2 Kg                       |
| STANDARD POWER SUPPLY | 380-415V 3                    |
| FREQUENCY             | 50/60 Hz                      |
| ELECTRICAL POWER      | 20 kW                         |
| IP GRADE              | IPX5                          |

CODICE  
CR1358229

 MODELLO  
D74/10GCII

 SERIE  
DIAMANTE 70

**SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSITNINGAR**

 MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm  
 MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

**Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda**

|    |   |      |   |
|----|---|------|---|
| E  | Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico  | G    | Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás                  |
| S  | Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água   | H20  | Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água |
| S1 | Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba  | A1 = | Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno   |
| S2 | Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão   | A2 = | Fredda - Kalt - Cold - Froid - Fria - Koude - Frio  |
| S3 | Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto | L    | Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível    |
| S4 | Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno   |      |   |

## INDUCTION - 20kw - On cabinet

CODICE  
CR1358229

MODELLO  
D74/10GCII

SERIE  
DIAMANTE 70



Power adjustable to 12 levels



Mechanically controlled induction  
ready for IOT connection to Cloud



Professional components tested to  
withstand intensive use over time



Safety sensor to prevent overheating.



Cooking zones with 5KW power