#### **BAIN-MARIE GAS TOP**



CODICE CR0990279 MODELLO
D72/10TCBG

SERIE
DIAMANTE 70



#### **GENERAL CHARACTERISTICS**

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

#### **TECHNICAL SPECIFICATIONS**

■ Temperature adjustable from 30 to 90 °c by thermostat. ■ Tub equipped with an overflow level. ■ Perforated false bottom for supporting containers. ■ Height of the work surface adjustable from 840 to

900 mm. ■ Stainless steel outer shells and feet.

■ Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.





#### **BAIN-MARIE GAS TOP**



CODICE CR0990279 **MODELLO**D72/10TCBG

**SERIE**DIAMANTE 70

## **Technical Information**

SPECIFICATION	DATA
MATERIAL	CR0990279
DEFINITION	D72/10 TCBG BAGNOMARIA GAS TOP M40
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	250 mm
NETWEIGHT	25 Kg
VOLUME (net)	0.073
PACKAGE LENGTH	460 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	670 mm
PACKAGE VOLUME	0,262 m3
GROSS PACKING WEIGHT	30.2 Kg
GAS POWER	3
GAS POWER (G25.3/25mbar)	2,80
CERTIFIED MODEL	D72/10 TCBG







CODICE CR0990279 **MODELLO**D72/10TCBG

SERIE
DIAMANTE 70

# SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

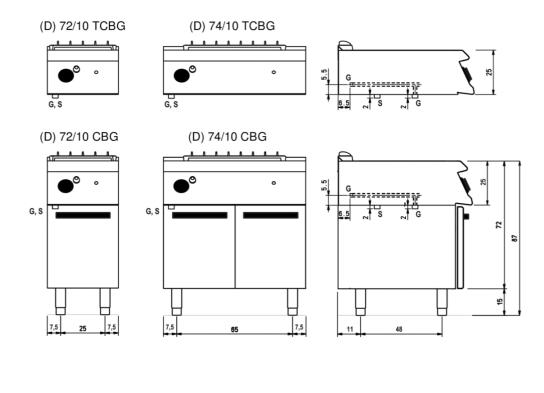



Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1/2






Olis Ali Group S.r.l.

### **BAIN-MARIE GAS TOP**



CODICE CR0990279 **MODELLO**D72/10TCBG

SERIE
DIAMANTE 70



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



