CLIS Weinnovate cooking

CODICE CR0990319 MODELLO D72/10CBG

SERIE DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Temperature adjustable from 30 to 90 °c by

thermostat. ■ Tub equipped with an overflow level. ■ Perforated false bottom for supporting containers. ■ Height of the work surface adjustable from 840 to

900 mm. ■ Stainless steel outer shells and feet.

• Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank. • Thanks to the jetproofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR0990319 MODELLO D72/10CBG **SERIE** DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990319
DEFINITION	D72/10 CBG BAGNOMARIA GAS M40 VANO G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NETWEIGHT	33 Kg
VOLUME (net)	0.254
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,435 m3
GROSS PACKING WEIGHT	42.2 Kg
GAS POWER	3
GAS POWER (G25.3/25mbar)	2,80
CERTIFIED MODEL	D72/10 CBG







CODICE CR0990319 MODELLO D72/10CBG

SERIE DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR



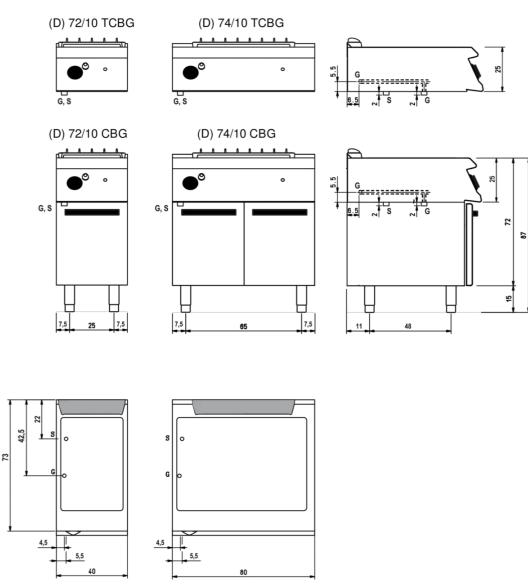

Legenda - Legende - Key - Légende - Leyenda - Legenda

- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz - Union de gas - Gasaansluiting
 EN 10226-1 R 1/2 ; EN ISO 228-1 G 1/2 (DK)
- S Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting EN 10226-1 R 1/2



CODICE CR0990319 MODELLO D72/10CBG **SERIE** DIAMANTE 70





Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

