

CODICECR1770049

MODELLOD73/10TSFTTGCS

DIAMANTE 70

SERIE



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ 15 mm thick cooking plate totally independent of the hob. ■ Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. ■ Large grease collection drawer. ■ Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Stainless steel overflow plug, supplied as an accessory, for channel flooding management ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions ■ Tubular burner with self-stabilising flame with great uniformity of heat distribution.

■ Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food • Large fat collection drawer with capacity of the entire volume of the perimeter channel ■ Grooved plate design ensures cleanliness right to the end of the plate ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Plate not welded to the machine bed with optimisation of structural points under thermal stress ■ Thermal cutting that facilitates the user and adjacent machinery. ■ Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. ■ Water dispenser kit available as an accessory ■ Brushed Chrome Cooking Plate, the innovative chrome plating technology adopted combines the strength of steel plates with the anti-oxidant properties of chrome plates, resulting in a slightly rough surface that improves resistance to cuts and bumps. Metal tools can be used directly on the plate without risking damage.





CODICE CR1770049 **MODELLO**D73/10TSFTTGCS

SERIEDIAMANTE 70

Technical Information

| SPECIFICATION | DATA |
|--------------------------|--------------|
| MATERIAL | CR1770049 |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | GAS |
| DIM. WIDTH | 600 mm |
| DIM. PRODUCTIVITY | 730 mm |
| DIM. HEIGHT | 250 mm |
| NET WEIGHT | 60 Kg |
| VOLUME (net) | 0.11 |
| PACKAGE LENGTH | 640 mm |
| PACKAGE WIDTH | 850 mm |
| PACKAGING HEIGHT | 550 mm |
| PACKAGE VOLUME | 0,300 m3 |
| GROSS PACKING WEIGHT | 68 Kg |
| GAS POWER | 9 |
| GAS POWER (G25.3/25mbar) | 9,00 |
| CERTIFIED MODEL | D73/10TSFTTG |
| | |



FRY TOP S GAS M60 Brushed Chrome Plate -


Smooth - Thermostat Top Version





CODICE CR1770049 **MODELLO**D73/10TSFTTGCS

SERIE DIAMANTE 70

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

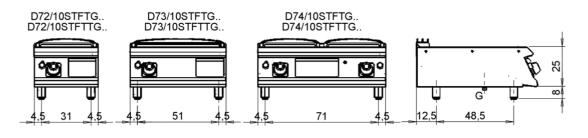

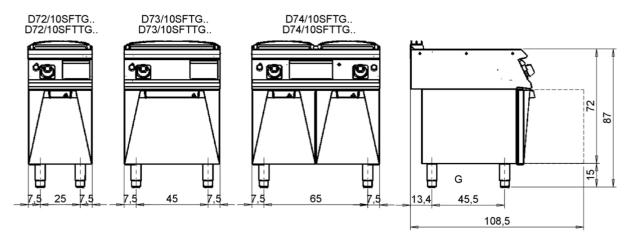

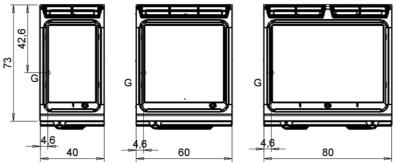

| Legenda - | Legende - | - Key - | Légende - | Leyenda - | Legenda - | - Legenda |
|-----------|-----------|---------|-----------|-----------|-----------|-----------|
| | | | | | | |

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
- G Arrivo gas Gasanschluss Gas connection Arrivée gaz -Union de gas - Gasaansluiting - Ligação gás
- Attacco scarico acqua Wasserablauf Water outlet Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S1 Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac -
- H20 Arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
- Descarga cuba Water toevoer Descarga da cuba
- A1 = Calda Heiss Warm Chaude Caliente Warm Morno
- Source Valvola di depressione Anti-depression valve Unterdruck ventil -Soupape de dépression - Válvula de dépresión - Onderdrukklep -Válvula de depressão
- A2 = Fredda Kalt Cold Froid Fria Koude Frio
- S3 Scarico acqua intercapedine Wasserablauf Zwischenraum Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto

- S4 Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível







CODICE CR1770049 MODELLO
D73/10TSFTTGCS

DIAMANTE 70

SERIE



Brushed chrome plate surface designed to resist scratches and facilitate daily cleaning. complies with Regulation (EC) No. 1935/2004



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.







CODICE CR1770049 **MODELLO**D73/10TSFTTGCS

SERIE
DIAMANTE 70

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|-----------|-----------|---|
| CR1354989 | PRPC | Smooth plate cleaning scraper - chrome-plated |
| CR1356399 | RPR | Striped chrome plate scraper |
| CR1658629 | D97CPFT68 | Fry top cleaning drawer M60 - M80 |
| CR1658609 | 97TFT | Plancha cleaning cap |
| CR1354999 | PKLR | Replacement blades (10PCS) |
| CR1658649 | 7AFT6 | M60 splash guard |
| CR1659239 | PAFT6 | SUPER FRY TOP ACCESSORY HOLDER M60 |
| CR1659379 | AKBFT-3 | KIT 1 BASIN GN1/3 H65 MM |
| CR1659369 | AKBFT-2 | KIT 2 BOWLS GN1/6 H65 MM |
| CR1659359 | AKBFT-1 | KIT 3 BOWLS GN1/9 H65 MM |
| CR1659259 | AGMFT48 | HOLDING GRID FOR FRY TOP |
| CR1659269 | AGMFT6 | HOLDING GRID FOR FRY TOP |
| CR1658709 | D7968CAFT | WATER LOADING FOR FRY TOP M60 M80 - D70 D90 - GAS OR ELECTRIC |
| CR1658989 | D76GKSCFT | CONTINUOUS EXHAUST FOR FRY TOP M60 - D70 - GAS |
| CR1659019 | D76GCSCFT | CONTINUOUS LOAD + SCAR.FOR FRY TOP M60 - D70 - GAS |

