CODICE CR1353659 MODELLO D7215/10FRERE

SERIE DIAMANTE 70





GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ AISI 18/10 stainless steel tanks with cold zone and foam expansion zone. ■ Oil drain taps. Oil drip pans on request. ■ Safety thermostat (230°C) against excessive oil temperatures.

Tank depth and width increased to increase capacity. Moulded basin with flat top and large cold zone for easy cleaning. The large cold zone allows frying residues to settle, significantly extending the

quality and life of the oil. **I** Heating element completely removable from the tank for faster and more thorough cleaning. **I** Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. **I** Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



CODICE CR1353659

MODELLO D7215/10FRERE

SERIE DIAMANTE 70



Technical Information

MATERIALCR1353659DEFINITIOND7215/10 FRERE FRIG.ELR/RIB.M40 1V 15LTCOMMERCIAL LINEDIAMANTESUPPLYELECTRICSDIM. WIDTH400 mmDIM. PRODUCTIVITY700 mmDIM. HEIGHT870 mmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE UNDTH850 mmPACKAGING HEIGHT1160 mmPACKAGING HEIGHT51 KgSTANDARD POWER SUPPLY51 KgFREQUENCY50/60 Hz	SPECIFICATION	DATA
COMMERCIAL LINEDIAMANTESUPPLYELECTRICSDIM. WIDTH400 nmDIM. PRODUCTIVITY700 nmDIM. HEIGHT870 nmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE LENGTH400 nmPACKAGE WIDTH850 nmPACKAGE VOLUME0.435 n3GROSS PACKING WEIGHT51 KgFADDARD POWER SUPPLYS00 Hz	MATERIAL	CR1353659
SUPPLYELECTRICSDIM. WIDTH400 mmDIM. PRODUCTIVITY700 mmDIM. HEIGHT870 mmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE LENGTH440 mmPACKAGE WIDTH850 mmPACKAGE VOLUME0.435 m3FACKAGE VOLUME51 KgGROSS PACKING WEIGHT51 KgFACUENCY5000 Hz	DEFINITION	D7215/10 FRERE FRIG.EL.R/RIB.M40 1V 15LT
DIM. WIDTH400 mmDIM. PRODUCTIVITY700 mmDIM. HEIGHT870 mmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE LENGTH440 mmPACKAGE WIDTH850 mmPACKAGE WIDTH0.435 m3FACKAGE VOLUME0.435 m3FACKAGE VOLUME51 KgSTANDARD POWER SUPPLY380-415V SNFREQUENCY50/60 Hz	COMMERCIAL LINE	DIAMANTE
DIM. PRODUCTIVITY700 mmDIM. HEIGHT870 mmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE LENGTH440 mmPACKAGE WIDTH850 mmPACKAGING HEIGHT1160 mmPACKAGE VOLUME0.435 m3GROSS PACKING WEIGHT51 KgFREQUENCY50/60 Hz	SUPPLY	ELECTRICS
DIM. HEIGHT870 nmNET WEIGHT42 KgVOLUME (net)0.244PACKAGE LENGTH440 mmPACKAGE WIDTH850 nmPACKAGING HEIGHT1160 mmPACKAGE VOLUME0.435 m3FACKAGE VOLUME51 KgSTANDARD POWER SUPPLY880-415 V SNFREQUENCY50/60 Hz	DIM. WIDTH	400 mm
NET WEIGHT42 Kg VOLUME (net)0.244 PACKAGE LENGTH440 mm PACKAGE WIDTH850 mm PACKAGING HEIGHT1160 mmPACKAGE VOLUME 0,435 m3 GROSS PACKING WEIGHT51 KgSTANDARD POWER SUPPLY 380-415V 3N FREQUENCY50/60 Hz	DIM. PRODUCTIVITY	700 mm
VOLUME (net)0.244PACKAGE LENGTH440 mmPACKAGE WIDTH850 mmPACKAGING HEIGHT1160 mmPACKAGE VOLUME0,435 m3GROSS PACKING WEIGHT51 KgSTANDARD POWER SUPPLY380-415V 3NFREQUENCY50/60 Hz	DIM. HEIGHT	870 mm
PACKAGE LENGTH440 mmPACKAGE WIDTH850 mmPACKAGING HEIGHT1160 mmPACKAGE VOLUME0,435 m3GROSS PACKING WEIGHT51 KgSTANDARD POWER SUPPLY380-415V 3NFREQUENCY50/60 Hz	NETWEIGHT	42 Kg
PACKAGE WIDTH850 mmPACKAGING HEIGHT1160 mmPACKAGE VOLUME0,435 m3GROSS PACKING WEIGHT51 KgSTANDARD POWER SUPPLY380-415V 3NFREQUENCY50/60 Hz	VOLUME (net)	0.244
PACKAGING HEIGHT 1160 mm PACKAGE VOLUME 0,435 m3 GROSS PACKING WEIGHT 51 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50/60 Hz	PACKAGE LENGTH	440 mm
PACKAGE VOLUME 0,435 m3 GROSS PACKING WEIGHT 51 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50/60 Hz	PACKAGE WIDTH	850 mm
GROSS PACKING WEIGHT 51 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50/60 Hz	PACKAGING HEIGHT	1160 mm
STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50/60 Hz	PACKAGE VOLUME	0,435 m3
FREQUENCY 50/60 Hz	GROSS PACKING WEIGHT	51 Kg
	STANDARD POWER SUPPLY	380-415V 3N
	FREQUENCY	50/60 Hz
ELECTRICAL POWER 15 KW	ELECTRICAL POWER	13 kW
IP GRADE IPX4	IP GRADE	IPX4
CERTIFIED MODEL D7215/10 FRERE	CERTIFIED MODEL	D7215/10 FRERE
Capacity 15 litri	Capacity	15 litri




to ISO 9001



CODICE CR1353659 MODELLO D7215/10FRERE

SERIE DIAMANTE 70

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

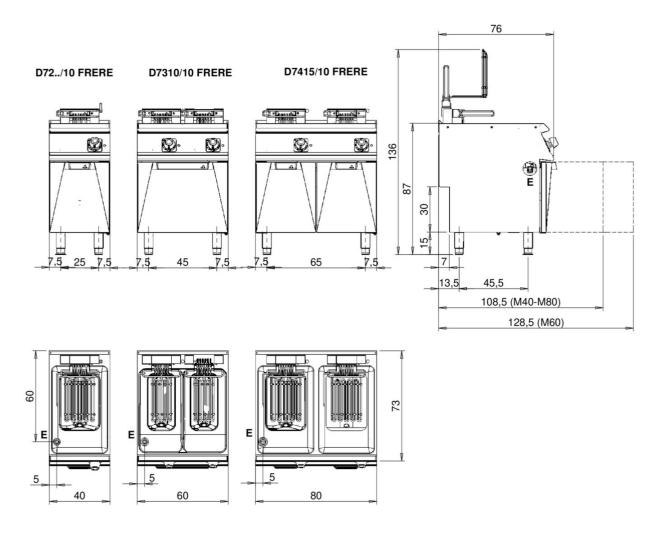

	Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda				
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás		
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção		
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba		alimentação água Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio		
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão				
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto				
		L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível		
S 4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation -				
	Tubo de drenaje - Aftapbuis - Tubulação de dreno				



ficato ISO 9001

CODICE CR1353659 MODELLO D7215/10FRERE **SERIE** DIAMANTE 70





Tank depth and width increased to increase capacity.




Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Moulded basin with flat top and large cold zone for easy cleaning.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Heating element completely removable from the tank for faster and more thorough cleaning.





CODICE CR1353659 MODELLO D7215/10FRERE

SERIE DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1356909	CA40/10	Chimney extension for mod. 40 cm h=22 cm
BN0221100048	CA60/10	Chimney extension for mod. 60 cm h=22 cm
CR0997179	7BRO	OIL PAN

