

CODICE CR1353689 MODELLO
D7415/10FRERE

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

TECHNICAL SPECIFICATIONS

- AISI 18/10 stainless steel tanks with cold zone and foam expansion zone. Oil drain taps. Oil drip pans on request. Safety thermostat (230°C) against excessive oil temperatures.
- Tank depth and width increased to increase capacity. Moulded basin with flat top and large cold zone for easy cleaning. The large cold zone allows frying residues to settle, significantly extending the

quality and life of the oil. • Heating element completely removable from the tank for faster and more thorough cleaning. • Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. • Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE CR1353689 **MODELLO**D7415/10FRERE

SERIEDIAMANTE 70

Technical Information

| SPECIFICATION | DATA |
|-----------------------|--|
| MATERIAL | CR1353689 |
| DEFINITION | D7415/10 FRERE FRIG.EL.R/RIB.M80 2V 15LT |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 700 mm |
| DIM. HEIGHT | 870 mm |
| NETWEIGHT | 71 Kg |
| VOLUME (net) | 0.487 |
| PACKAGE LENGTH | 840 mm |
| PACKAGE WIDTH | 850 mm |
| PACKAGING HEIGHT | 1170 mm |
| PACKAGE VOLUME | 0,836 m3 |
| GROSS PACKING WEIGHT | 85 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50 Hz |
| ELECTRICAL POWER | 26 kW |
| IP GRADE | IPX4 |
| Capacity | 15 litri |






CODICE CR1353689


MODELLO

SERIE

D7415/10FRERE DIAMANTE 70

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

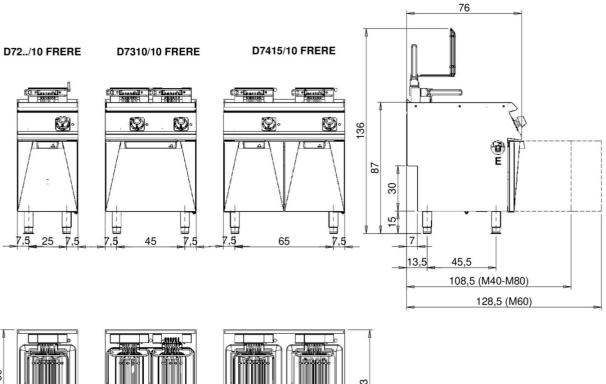

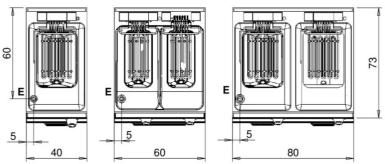

| | Legenda - Legende - Key - Légende - Leyenda - Legenda | | | | | |
|----|--|---|--|--|--|--|
| E | Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G | Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás | | | |
| S | Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água | | 20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água | | | |
| S1 | Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | | Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio | | | |
| S2 | Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão | | | | | |
| S3 | Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto | | Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível | | | |
| S4 | Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno | | Tilveau - Cino de niver - Niveauni adir - Torrella de niver | | | |







CODICE CR1353689

MODELLO
D7415/10FRERE

SERIE
DIAMANTE 70



Tank depth and width increased to increase capacity.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Moulded basin with flat top and large cold zone for easy cleaning.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Heating element completely removable from the tank for faster and more thorough cleaning.







CODICE CR1353689 **MODELLO**D7415/10FRERE

SERIE

DIAMANTE 70

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|--------------|-----------|---|
| CR1353879 | DCF15/17 | Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres |
| CR1353889 | DCF15/17P | Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres |
| CR1356909 | CA40/10 | Chimney extension for mod. 40 cm h=22 cm |
| BN0221100048 | CA60/10 | Chimney extension for mod. 60 cm h=22 cm |
| CR0997179 | 7BRO | OIL PAN |

