

DIRECT GAS BOILING PAN LT.80

CODICE
CR0990149

MODELLO
D74/10PGD08

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Stainless steel outer shells and feet. ■ AISI 304 stainless steel tanks with AISI 316 bottom. ■ Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

■ Possibility of hot or cold water loading ■ Stainless steel tank with aisi 316 bottom ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

DIRECT GAS BOILING PAN LT.80

CODICE
CR0990149

MODELLO
D74/10PGD08

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990149
DEFINITION	D74/10 PGD08 PENTOLA GAS DIR. M80 80LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	109.8 Kg
VOLUME (net)	0.508
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	120 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0.015 kW
GAS POWER	17
GAS POWER (G25.3/25mbar)	16,50
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 PGD08
Capacity	80

DIRECT GAS BOILING PAN LT.80


CODICE
CR0990149

MODELLO
D74/10PGD08


SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIONSCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

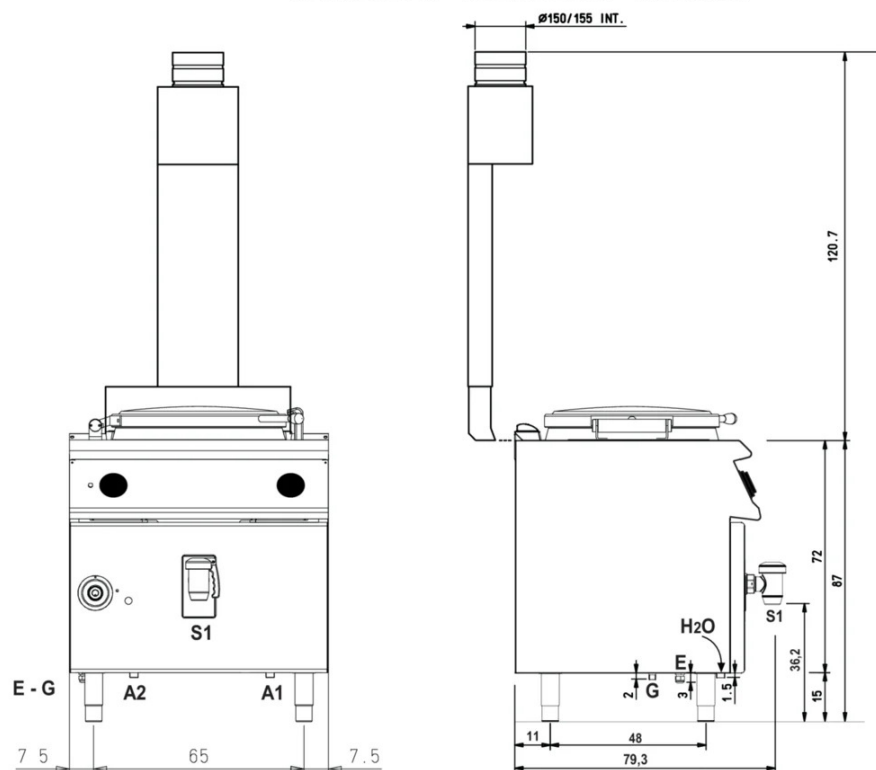

(D) 74/10 PGD08

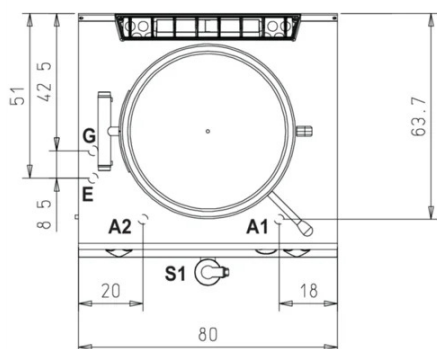

Legenda - Legende - Key
Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss
Water inlet - Arrivée eau - Union de agua
Wateraansluiting
- A1** = Calda - Heiss - Warm
Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold
Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica
Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable
Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss
Gas connection - Arrivée gaz - Union de gas
Gasaansluiting
- EN 10226-1 R 1/2**
- EN ISO 228-1 G 1/2 (DK)**
- S1** Scarico acqua - Wasserablauf - Water outlet
Vidange de l'eau - Desaguadero
Wateraftapaansluiting
1 1/2"

DIRECT GAS BOILING PAN LT.80

CODICE
CR0990149

MODELLO
D74/10PGD08

SERIE
DIAMANTE 70



Possibility of hot or cold water loading



Stainless steel tank with aisi 316
bottom



Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.

DIRECT GAS BOILING PAN LT.80

CODICE
CR0990149

MODELLO
D74/10PGD08

SERIE
DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	COLANDER BASKET
MA97348000	9CV5	VEGETABLE STRAINER BASKET FOR POT
CR0599730	7C8	COLAPASTA BASKET - 80 Lt. HOLES Ø 3 MM - 1 SECTOR
CR0599740	7CV8	COOLING BOWL FOR POTS - 80 Lt. HOLES Ø 6 MM - 1 SECTOR
MA97349000	9-I5	POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM