

INDIRECT ELECTRIC BOILING PAN 50 lt WITH AUTOMATIC CONDENSATE DRAIN VALVE

CODICE
CR1356079

MODELLO
D73/10PEI05S

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

■ Stainless steel outer shells and feet. ■ AISI 304 stainless steel tanks with AISI 316 bottom. ■ Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

■ Possibility of hot or cold water loading ■ Stainless steel tank with aisi 316 bottom ■ Indirect pans with automatic condensate drain

valve ■ Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme. ■ Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

INDIRECT ELECTRIC BOILING PAN 50 lt WITH AUTOMATIC CONDENSATE DRAIN VALVE

CODICE
CR1356079

MODELLO
D73/10PEI05S

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356079
DEFINITION	D73/10 PEI05 S PEN.ELE IND.M60 C/VAL 50L
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	95 Kg
VOLUME (net)	0.381
PACKAGE LENGTH	660 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1240 mm
PACKAGE VOLUME	0,695 m3
GROSS PACKING WEIGHT	105 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9.8 kW
IP GRADE	IPX5
CERTIFIED MODEL	D73/10 PEI05S
Capacity	50 litri

INDIRECT ELECTRIC BOILING PAN 50 lt WITH AUTOMATIC CONDENSATE DRAIN VALVE


CODICE
CR1356079

MODELLO
D73/10PEI05S


SERIE
DIAMANTE 70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

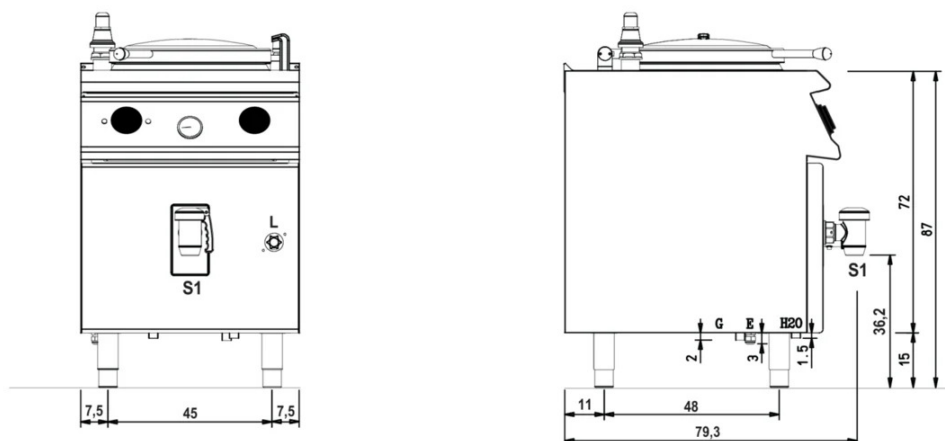

(D) 73/10 PEI05

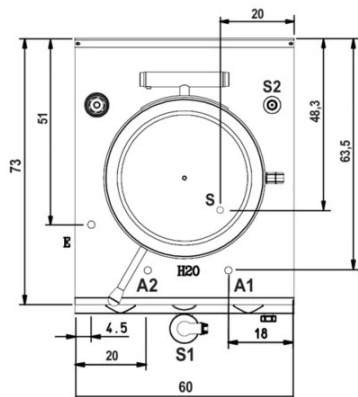

Legenda - Legende - Key - Légende - Leyenda - Legenda

H2O Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting

A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm

A2 = Fredda - Kalt - Cold - Froid - Fria - Koude

EN ISO 228-1 G 3/4

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief

Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

S Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain

Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte

EN ISO 10226-1 R 3/4

S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting
1 1/2"

INDIRECT ELECTRIC BOILING PAN 50 lt WITH AUTOMATIC CONDENSATE DRAIN VALVE

CODICE
CR1356079

MODELLO
D73/10PEI05S

SERIE
DIAMANTE 70



Possibility of hot or cold water loading



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Stainless steel tank with aisi 316 bottom



Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



INDIRECT ELECTRIC BOILING PAN 50 lt WITH AUTOMATIC CONDENSATE DRAIN VALVE

CODICE
CR1356079

MODELLO
D73/10PEI05S

SERIE
DIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	COLANDER BASKET
MA97348000	9CV5	VEGETABLE STRAINER BASKET FOR POT
CR0599730	7C8	COLAPASTA BASKET - 80 Lt. HOLES Ø 3 MM - 1 SECTOR
CR0599740	7CV8	COOLING BOWL FOR POTS - 80 Lt. HOLES Ø 6 MM - 1 SECTOR
MA97349000	9-I5	POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM