

# REFRIGERATED BASE UNIT 3 DOORS - GAS R290A

## - TEMP. -20° - 15°

CODICE  
FROL2DX31Q00211

MODELLO  
SNF-40/3M-BT

SERIE  
DIAMANTE 70



### GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

# REFRIGERATED BASE UNIT 3 DOORS - GAS R290A

- TEMP. -20° - 15°

CODICE  
FROL2DX31Q00211

MODELLO  
SNF-40/3M-BT

SERIE  
DIAMANTE 70

## TECHNICAL SPECIFICATIONS

### ■ GENERAL FEATURES

Exterior sides, back, doors and work surface made of stainless steel (Scotch-Brite satin finish).

Stainless steel outer bottom Fully radiused stainless steel inner lining.

Containment-molded inner bottom High-density polyurethane foam insulation (about 42 kg/m<sup>3</sup>) 50 mm thick, HCFC-free.

Copper-aluminum evaporating coil, cataphoresis painted with non-toxic epoxy resin.

Condensing coil made of painted iron with high thermal efficiency.

Anti-condensation heater, placed on the box under the magnetic gasket rebate.

Ergonomic handle on full width of door or drawer and magnetic gaskets on 4 sides.

Adjustable Ø 2" stainless steel feet H 150÷200 mm.

### INTERIOR FITTINGS

Stainless steel uprights and guides, positioned interlocking to facilitate cleanability.

One pair of guides per on open cabinet.

### REFRIGERATION UNIT

Ventilated evaporator to ensure maximum efficiency of the cooling system.

Compressor and condenser mounted on a removable base for easy and simple maintenance or replacement.

Environmentally friendly refrigerant fluid R290.

Automatic electric resistance defrosting device and condensate water evaporation system without electricity input.

Automatic evaporation of condensation water by means of electric resistance on prepared models.

### CONTROLS, CONTROLS AND SAFETIES

Electronic teletermostat with temperature probe.

Automatically reset thermal protector to safeguard the compressor.

# REFRIGERATED BASE UNIT 3 DOORS - GAS R290A

## - TEMP. -20° - 15°

CODICE  
FROL2DX31Q00211

MODELLO  
SNF-40/3M-BT

SERIE  
DIAMANTE 70

### Technical Information

| SPECIFICATION         | DATA            |
|-----------------------|-----------------|
| MATERIAL              | FROL2DX31Q00211 |
| SUPPLY                | ELECTRICS       |
| DIM. WIDTH            | 1600 mm         |
| DIM. PRODUCTIVITY     | 630 mm          |
| DIM. HEIGHT           | 610 mm          |
| GROSS PACKING WEIGHT  | 107 Kg          |
| STANDARD POWER SUPPLY | 220-240V 1N     |
| ELECTRICAL POWER      | 0.485 kW        |
| REFRIGERATION POWER   | 1187            |
| ENERGY CLASS          | F               |
| CLIMA CLASS           | 5               |


# REFRIGERATED BASE UNIT 3 DOORS - GAS R290A

## - TEMP. -20° - 15°



CODICE  
FROL2DX31Q00211

MODELLO  
SNF-40/3M-BT

SERIE  
DIAMANTE 70

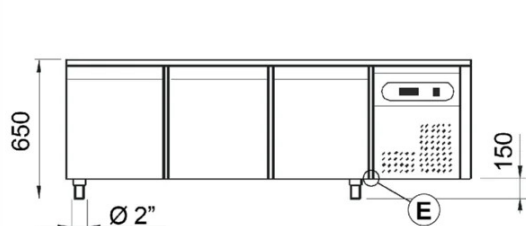

predisposto  
equipped

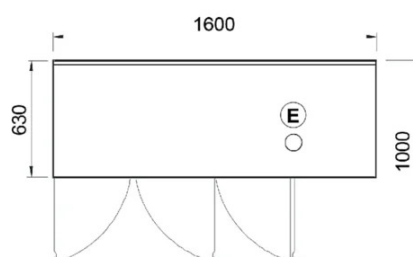

Ⓔ connessione elettrica  
electrical connection

Ⓖ connessione gas refrigerante  
refrigerant gas connection

# REFRIGERATED BASE UNIT 3 DOORS - GAS R290A

## - TEMP. -20° - 15°

CODICE  
FROL2DX31Q00211

MODELLO  
SNF-40/3M-BT

SERIE  
DIAMANTE 70

### ACCESSORIES

| CODE         | MODELLO      | DESCRIZIONE                                                  |
|--------------|--------------|--------------------------------------------------------------|
| BN0221700183 | BN0221700183 | REFRIGERATED BASE PROFILE M160 - TOP INSTALLATION 900 SERIES |
| BN0221700180 | BN0221700180 | REFRIGERATED BASE PROFILE M160 - TOP INSTALLATION 700 SERIES |