

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207319
DEFINITION	DPCG80 4 FUOCHI DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	740 mm
DIM. HEIGHT	295 mm
NET WEIGHT	49 Kg
VOLUME (net)	0.175
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	830 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,392 m3
GROSS PACKING WEIGHT	59 Kg
GAS POWER	18.4
GAS POWER (G25.3/25mbar)	17,96
N. FIRES/PLATES	QUATTRO FUOCHI
CERTIFIED MODEL	DPCG80

4-BURNER GAS COOKER

CODICE
CR1207319


MODELLO
DPCG80

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

DPCG40 DI7PCG40
DPCG80 DI7PCG80

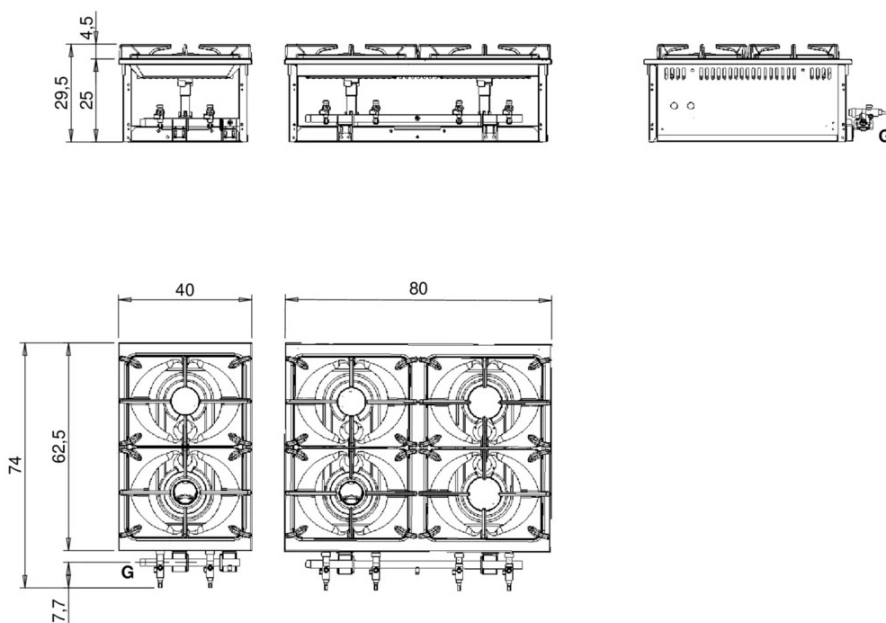

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R1/2; EN ISO 228-1 G1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

4-BURNER GAS COOKER

CODICE
CR1207319

MODELLO
DPCG80

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201920	CR1201920	FRAME KIT FOR FLUSH INSTALLATION - M80
CR1201950	CR1201950	FRAME KIT FOR FREE-STANDING INSTALLATION - M80
BN418031910010	7PRL	SMOOTH RADIANT PLATE
BN418031910020	7PRR	RIBBED RADIANT PLATE
BN826190250	N7BA	REMOVABLE BASIN
BN826330160	BN826330160	Stainless steel double-fire grill 39x58